



### DESCRIPTION

The AO1369S is an OP Amp with shutdown function. The AO1369S has a high gain-bandwidth product of 14.5KHz, a slew rate of 6V/ms, and a quiescent current of 600nA/amplifier at 5V.

The AO1369S is designed to provide optimal performance in low voltage and low noise systems. They provide rail-to-rail output swing into heavy loads. The input common mode voltage range includes ground, and the maximum input offset voltage is 3mV for AO1369S.

AO1369S is specified over the extended industrial temperature range (-40°C to +125°C).

The operating range is from 1.4V to 5.5V.

The AO1369S is available in SOT-26 and SC70-6 Packages.

### FEATURE

- Single-Supply Operation from +1.4V ~ +5.5V
- Rail-to-Rail Input / Output
- Gain-Bandwidth Product: 14.5KHz (Typ)
- Low Input Bias Current: 1pA (Typ)
- Low Offset Voltage: 3mV (Max)
- Quiescent Current: 600nA per Amplifier (Typ)
- Operating Temperature: -40°C ~ +125°C
- Embedded RF Anti-EMI Filter



### APPLICATION

- ASIC Input or Output Amplifier
- Sensor Interface
- Medical Communication
- Smoke Detectors
- Audio Output
- Piezoelectric Transducer Amplifier
- Medical Instrumentation
- Portable Systems

### ORDERING INFORMATION

Package Type	Part Number	
SOT-26 SPQ: 3,000pcs/Reel	E6	AO1369SE6R-X
		AO1369SE6VR-X
SC70-6 SPQ: 3,000pcs/Reel	C6	AO1369SC6R-X
		AO1369SC6VR-X
Note	X: Active High or Low H = High L = Low V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products		

### TYPICAL APPLICATION

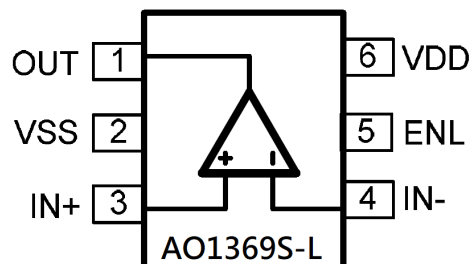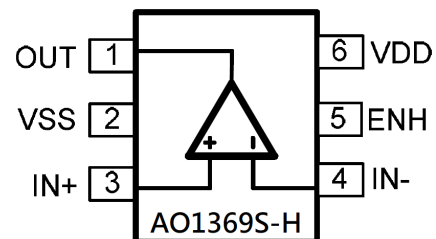



**PIN DESCRIPTION**

<p style="text-align: center;"><b>AO1369S-H</b> SOT-26</p> <p style="text-align: center;">SOT-26, E6 Top View</p>		<p style="text-align: center;"><b>AO1369S-L</b> SOT-26</p> <p style="text-align: center;">SOT-26, E6 Top View</p>	
<p style="text-align: center;"><b>AO1369S-H</b> SC70-6</p> <p style="text-align: center;">SC70-6, C6 Top View</p>		<p style="text-align: center;"><b>AO1369S-L</b> SC70-6</p> <p style="text-align: center;">SC70-6, C6 Top View</p>	
Pin #		Symbol	Functions
SOT-25 SC70-5	SOT-26 SC70-6		
1	1	OUT	Output Voltage
2	2	VSS	Ground or Negative Power Supply Input
3	3	IN+	Analog Positive Input
4	4	IN-	Analog Inverting Input
5	5	ENH/ENL	Enable, H=Active High, L=Active Low
6	6	VDD	Positive Power Supply Input



**ABSOLUTE MAXIMUM RATINGS**

Power Supply Voltage (V <sub>DD</sub> to V <sub>SS</sub> )	-0.5V ~ +7.5V	
Analog Input Voltage (IN+ or IN-)	V <sub>SS</sub> -0.5V ~ V <sub>DD</sub> +0.5V	
PDB Input Voltage	V <sub>SS</sub> -0.5V ~ +7V	
Operating Temperature Range	-40°C ~ +125°C	
Junction Temperature	+160°C	
Storage Temperature Range	-55°C ~ +150°C	
Lead Temperature (soldering, 10sec)	+260°C	
Package Thermal Resistance $\theta_{JA}$ (T <sub>A</sub> =+25°C)	SOT-26	190°C/W
	SC70-6	333°C/W
ESD Susceptibility	HBM	6KV
	MM	300V

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



**ELECTRICAL CHARACTERISTICS**

$V_S = +5V$ ,  $R_L = 1M\Omega$  connected to  $V_S/2$ , and  $V_{OUT} = V_S/2$ , unless otherwise noted

Parameter	Symbol	Conditions	Typ.	Min.	Max.	Unit
<b>INPUT CHARACTERISTICS</b>						
Input Offset Voltage	$V_{OS}$	$V_{CM} = V_S/2$	0.4	-	3	mV
Input Bias Current	$I_B$	-	1	-	-	pA
Input Offset Current	$I_{OS}$	-	1	-	-	pA
Common-Mode Voltage Range	$V_{CM}$	$V_S = 5.5V$	-0.1 to +5.6	-	-	V
Common-Mode Rejection Ratio	$C_{MRR}$	$V_S = 5V$ , $V_{CM} = -0.1V$ to $2.5V$	78	66	-	dB
		$V_S = 5V$ , $V_{CM} = -0.1V$ to $5.1V$	84	67	-	
Open-Loop Voltage Gain	$A_{OL}$	$V_S=1.4V$ , $R_L = 50k\Omega$ , $V_O = V_S-0.1V$	86	75	-	dB
		$V_S=5V$ , $R_L = 50k\Omega$ , $V_O = V_S-0.1V$	93	84	-	
Input Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	-	2.5	-	-	$\mu V/^\circ C$
<b>OUTPUT CHARACTERISTICS</b>						
Output Voltage Swing from Rail	$V_{OH}$	$V_S=1.4V$ , $R_L = 50k\Omega$	1.395	1.390	-	V
	$V_{OL}$		4.5	-	10	mV
	$V_{OH}$	$V_S=5V$ , $R_L = 50k\Omega$	4.997	4.990	-	V
	$V_{OL}$		3.5	-	10	mV
Output Current	$I_{SOURCE}$	$R_L = 10\Omega$ to $V_S/2$	20	-	-	mA
	$I_{SINK}$		20	-	-	mA
<b>POWER SUPPLY</b>						
Operating Voltage Range			1.4	-	-	V
			5.5	-	-	V
Power Supply Rejection Ratio	$P_{SRR}$	$V_S = +1.4V$ to $+5.5V$ , $V_{CM} = +0.5V$	80	77	-	dB
Quiescent Current / Amplifier	$I_Q$		600	-	-	nA
Shutdown Current / Amplifier	$I_{Q\_off}$		54			nA
<b>DYNAMIC PERFORMANCE (<math>C_L = 100pF</math>)</b>						
Gain-Bandwidth Product	$G_{BP}$		14.5	-	-	KHz
Slew Rate	$S_R$	$G = +1$ , 2V Output Step	6	-	-	V/ms



### TYPICAL PERFORMANCE CHARACTERISTICS

Fig.1 Large Signal Inverting Pulse Response

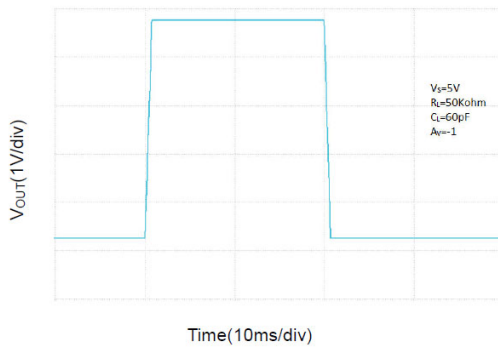


Fig.2 Large Signal Non-Inverting Pulse Response

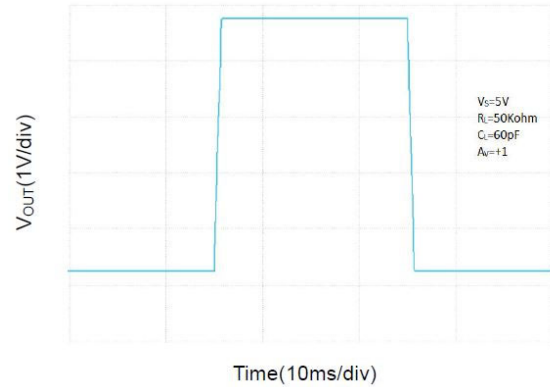


Fig.3 Small Signal Inverting Pulse Response

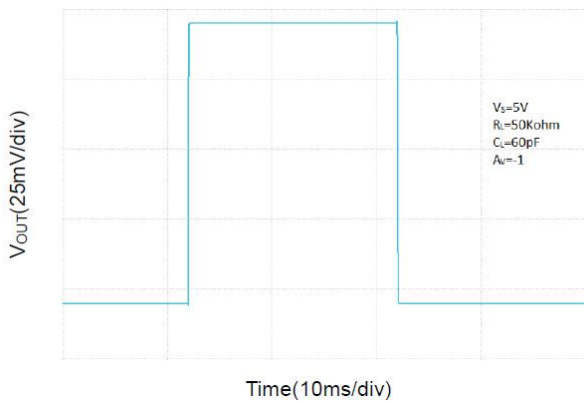


Fig.4 Small Signal Non-Inverting Pulse Response

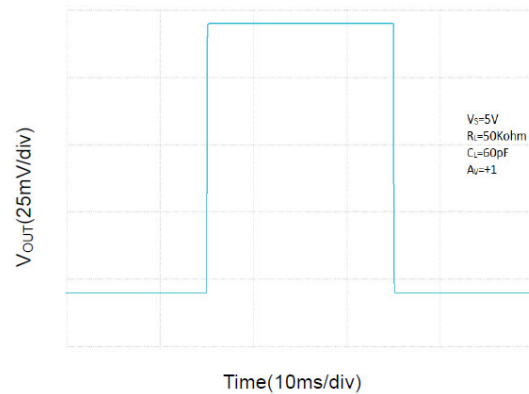


Fig.5 No Phase Reversal



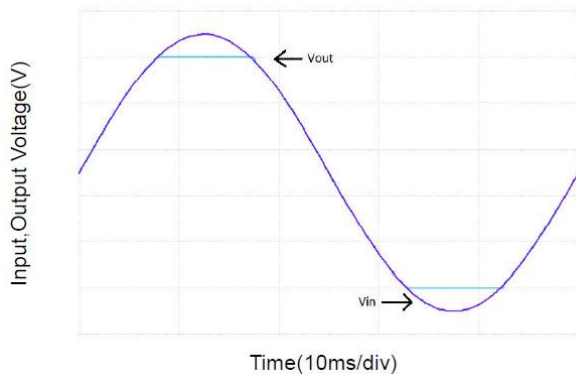


Fig.6 Output Settling Time



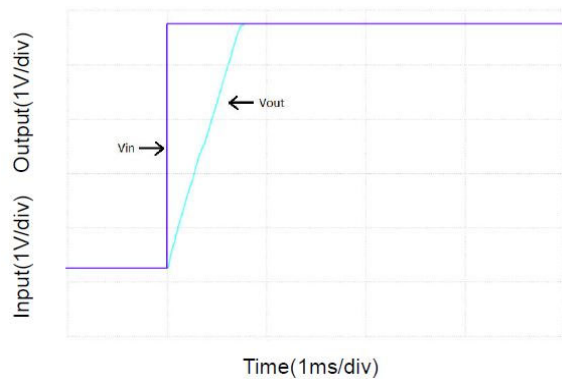

## BLOCK DIAGRAM

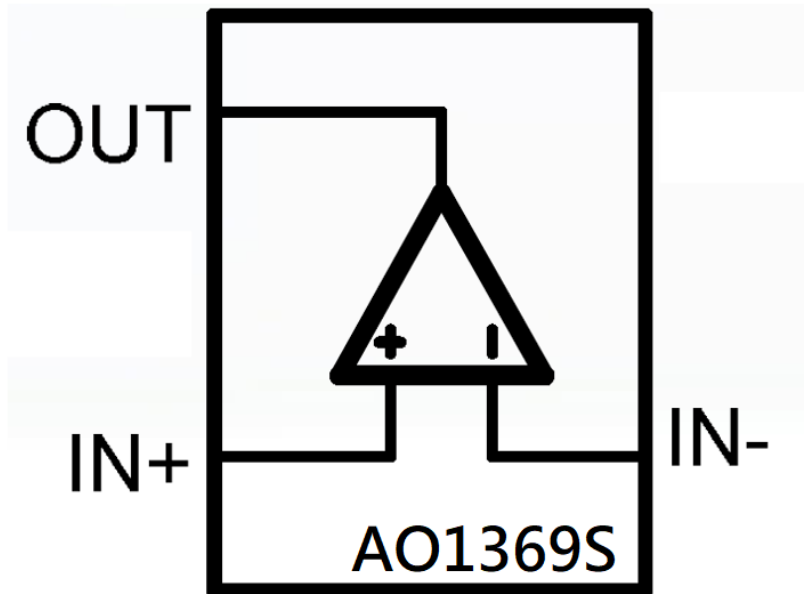

## DETAILED INFORMATION

The AO1369S op amp is unity-gain stable and suitable for a wide range of general-purpose applications.

The small footprints of the AO1369S packages save space on printed circuit boards and enable the design of smaller electronic products.

### Power Supply Bypassing and Board Layout

The AO1369S operates from a single 1.4V to 5.5V supply or dual  $\pm 0.7V$  to  $\pm 2.75V$  supplies. For best performance, a  $0.1\mu F$  ceramic capacitor should be placed close to the  $V_{DD}$  pin in single supply operation. For dual supply operation, both  $V_{DD}$  and  $V_{SS}$  supplies should be bypassed to ground with separate  $0.1\mu F$  ceramic capacitors.

### Low Supply Current

The low supply current (typical 600nA per channel) of the AO1369S will help to maximize battery life. AO1369S is ideal for battery powered systems.



### Operating Voltage

The AO1369S operates under wide input supply voltage (1.4V to 5.5V). In addition, all temperature specifications apply from -40°C to +125°C. Most behavior remains unchanged throughout the full operating voltage range. These guarantees ensure operation throughout the single Li-Ion battery lifetime.

### Rail-to-Rail Input

The input common-mode range of AO1369S extends 100mV beyond the supply rails ( $V_{SS}-0.1V$  to  $V_{DD}+0.1V$ ). This is achieved by using complementary input stage. For normal operation, inputs should be limited to this range.

### Rail-to-Rail Output

Rail-to-Rail output swing provides maximum possible dynamic range at the output. This is particularly important when operating in low supply voltages. The output voltage of AO1369S can typically swing to less than 50mV from supply rail in light resistive loads (>50kΩ).

### Capacitive Load Tolerance

The AO1369S is optimized for bandwidth and speed, not for driving capacitive loads. Output capacitance will create a pole in the amplifier's feedback path, leading to excessive peaking and potential oscillation. If dealing with load capacitance is a requirement of the application, the two strategies to consider first, using a small resistor in series with the amplifier's output and the load capacitance and reducing the bandwidth of the amplifier's feedback loop by increasing the overall noise gain. Figure 1. shows a unity gain follower using the series resistor strategy. The resistor isolates the output from the capacitance and, more importantly, creates a zero in the feedback path that compensates for the pole created by the output capacitance.

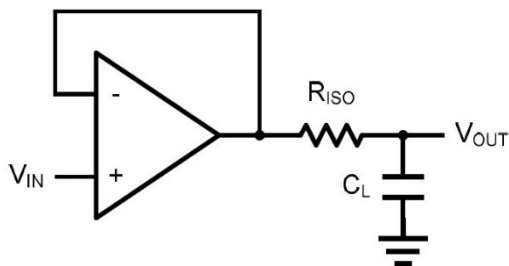


Figure 1. Indirectly Driving a Capacitive Load Using Isolation Resistor

The bigger the  $R_{ISO}$  resistor value, the more stable  $V_{OUT}$  will be. However, if there is a resistive load  $R_L$  in parallel with the capacitive load, a voltage divider (proportional to  $R_{ISO}/R_L$ ) is formed, this will result in a gain error.



The circuit in Figure 2 is an improvement to the one in Figure 1. RF provides the DC accuracy by feed-forward the VIN to RL. CF and RISO serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving the phase margin in the overall feedback loop. Capacitive drive can be increased by increasing the value of CF. This in turn will slow down the pulse response.

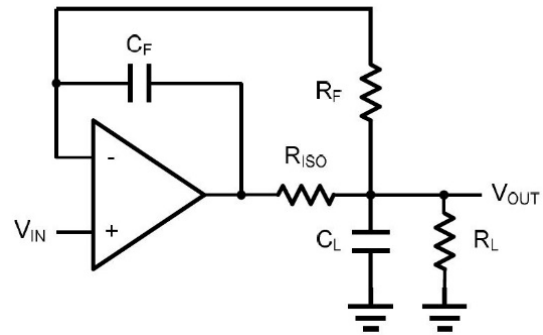


Figure 2. Indirectly Driving a Capacitive Load with DC Accuracy

**Differential Amplifier**

The differential amplifier allows the subtraction of two input voltages or cancellation of a signal common the two inputs. It is useful as a computational amplifier in making a differential to single-end conversion or in rejecting a common mode signal. Figure 3. shown the differential amplifier using AO1369S.

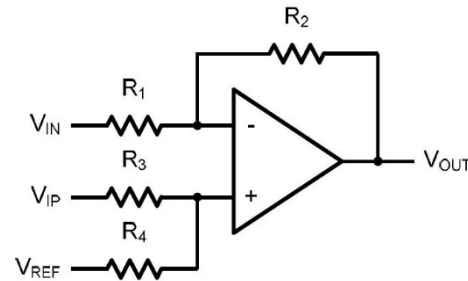


Figure 3. Differential Amplifier

$$V_{OUT} = \left(\frac{R_1+R_2}{R_3+R_4}\right) \frac{R_4}{R_1} V_{IN} - \frac{R_2}{R_1} V_{IP} + \left(\frac{R_1+R_2}{R_3+R_4}\right) \frac{R_3}{R_1} V_{REF}$$

If the resistor ratios are equal (i.e. R1=R3 and R2=R4), then

$$V_{OUT} = \frac{R_2}{R_1} (V_{IP} - V_{IN}) + V_{REF}$$

**Low Pass Active Filter**

The low pass active filter is shown in Figure 4. The DC gain is defined by -R2/R1. The filter has a -20dB/decade roll-off after its corner frequency  $f_c = 1/(2\pi R_3 C_1)$ .




Figure 4. Low Pass Active Filter

**Instrumentation Amplifier**

The triple AO1369S can be used to build a three-op-amp instrumentation amplifier as shown in Figure 5. The amplifier in Figure 5 is a high input impedance differential amplifier with gain of R2/R1. The two differential voltage followers assure the high input impedance of the amplifier.





Figure 5. Instrument Amplifier





**PACKAGE INFORMATION**


Dimension in SOT23-6 (Unit: mm)

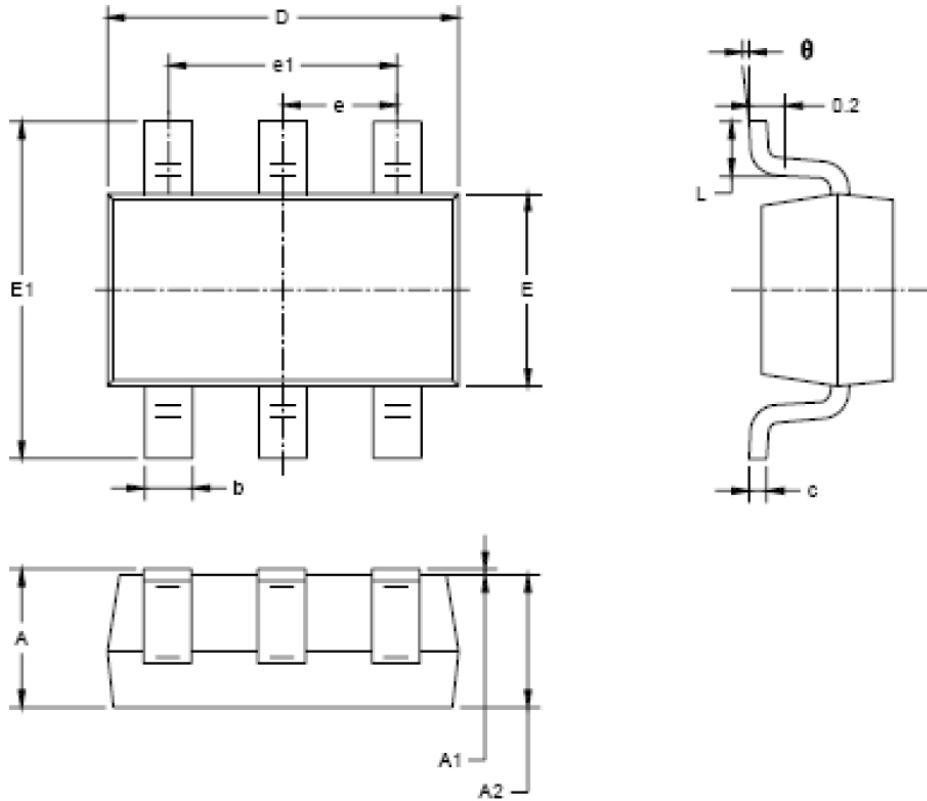

Symbol	MILLIMETERS	
	Min.	Max.
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
C	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950 BSC	
e1	1.900 BSC	
L	0.300	0.600
theta	0°	8°



Dimension in SC70-6 (Unit: mm)

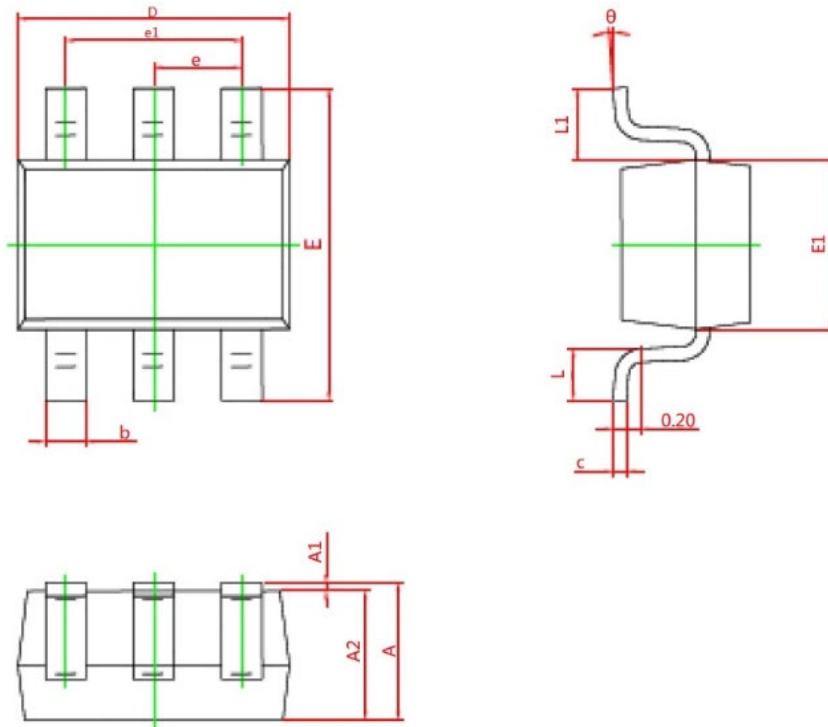

Symbol	MILLIMETERS	
	Min.	Max.
A	0.900	1.100
A1	0.000	0.100
A2	0.900	1.000
b	0.150	0.350
c	0.080	0.150
D	2.000	2.200
E	2.150	2.450
E1	1.150	1.350
e	0.650 TYP	
e1	1.200	1.400
L	0.260	0.460
L1	0.525 REF	
θ	0°	8°



## IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.