



DESCRIPTION

The AO1316 is a single rail –to-rail CMOS operational amplifiers and optimized for low voltage single supply operation and low noise systems. The AO1316 provides a high gain-bandwidth product of 6MHz, a high slew rate of 4.2V/μs.

The AO1316 feature rail-to-rail input and output swing into heavy loads and low quiescent current (470μA, at 5V) and high electrostatic discharge (ESD) protection (8-kV HBM) . The AO1316 input common mode voltage range includes ground, and the maximum input offset voltage is 3.5mV.

The AO1316 is optimized for operation at voltages as low as +2.1V and up to +5.5V and are specified over the extended industrial temperature range (-40°C to +125°C).

The AO1316 is available in SOT-25 and SC70-5 packages.

FEATURES

- Wide Supply Range: 2.1V to 5.5V
- Wide Gain-Bandwidth: 6MHz (Typ.)
- Low Noise: 13nV/√Hz at 1kHz
- Quiescent Current: 470μA/Channel (Typ.)
- High Slew Rate of 4.2V/μs
- Low Input Bias Current: 1pA (Typ.)
- Low Offset Voltage: 3.5mV (Max.)
- Rail-to-Rail Input / Output
- Operating Temperature: -40°C ~ +125°C
- Available in SOT-25 and SC70-5 packages


APPLICATION

- Driving A/D Converters
- Audio, Sensor
- Laptops and PDAs
- Battery-Powered Instrumentation
- Data Acquisition
- Process Control
- Communications
- Test Equipment
- Sensors, Active Filters
- Cellular and Cordless Phones

ORDERING INFORMATION

Package Type	Part Number	
SOT-25 SPQ: 3,000pcs/Reel	E5	AO1316E5R
		AO1316E5VR
SC70-5 SPQ: 3,000pcs/Reel	C5	AO1316C5R
		AO1316C5VR
Note	V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products		

TYPICAL APPLICATION

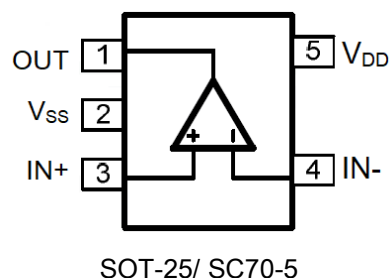



PIN DESCRIPTION

AO1316 SOT-25 SOT-25, E5 Top View		AO1316 SC70-5 SC70-5, C5 Top View	
Pin #		Symbol	Function
SOT-25	SC70-5		
1	1	OUT	Output
2	2	V _{SS}	Ground or Negative Power Supply Input
3	3	IN+	Analog Positive Input
4	4	IN-	Analog Inverting Input
5	5	V _{DD}	Positive Power Supply Input

ABSOLUTE MAXIMUM RATINGS

Power Supply Voltage (V _{DD} to V _{SS})	-0.5V ~ +7.5V
Analog Input Voltage (IN+ or IN-)	V _{SS} -0.5V ~ V _{DD} +0.5V
PDB Input Voltage	V _{SS} -0.5V ~ +7V
Operating Temperature Range	-40°C ~ 125°C
Junction Temperature	+160°C
Storage Temperature Range	-55°C ~ 150°C
Lead Temperature (soldering, 10sec)	+260°C
Package Thermal Resistance (T_A=+25°C)	
θ _{JA} , SOT-25	190°C/W
θ _{JA} , SC70-5	333°C/W
ESD Susceptibility	
HBM	8kV
MM	400V

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

At $V_S=5V$, $T_A = +25^\circ C$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

Parameter	Symbol	Conditions	Typ	Min/Max Over Temperature					
			+25°C	+25°C	0°C to 70°C	-40°C to 85°C	-40°C to 125°C	Unit	Min / Max
INPUT CHARACTERISTICS									
Input Offset Voltage	V _{OS}		0.8	3.5	3.9	4.3	4.6	mV	Max
Input Bias Current	I _B		1	-	-	-	-	pA	Typ
Input Offset Current	I _{OS}		1	-	-	-	-	pA	Typ
Input Common Mode Voltage Range	V _{CM}	V _S = 5.5V	-0.1 to +5.6	-	-	-	-	V	Typ
Common Mode Rejection Ratio	CMRR	V _S = 5.5V, V _{CM} = -0.1V to 4V	90	73	70	70	65	dB	Min
		V _S = 5.5V, V _{CM} = -0.1V to 5.6V	83	-	-	-	-	dB	Min
Open-Loop Voltage Gain	A _{OL}	R _L = 600Ω, V _O = 0.15V to 4.85V	97	90	87	86	79	dB	Min
		R _L = 10kΩ, V _O = 0.05V to 4.95V	108	-	-	-	-	dB	Min
Input Offset Voltage Drift	ΔV _{OS} /ΔT		2.4	-	-	-	-	μV/°C	Typ
OUTPUT CHARACTERISTICS									
Output Voltage Swing from Rail		R _L = 600Ω	0.1	-	-	-	-	V	Typ
		R _L = 10kΩ	0.015	-	-	-	-	V	Typ
Output Current	I _{OUT}		53	49	45	40	35	mA	Min
Closed-Loop Output Impedance		f = 200kHz, G = 1	3	-	-	-	-	Ω	Typ




Parameter	Symbol	Conditions	Typ	Min/Max Over Temperature					
			+25°C	+25°C	0°C to 70°C	-40°C to 85°C	-40°C to 125°C	Unit	Min / Max
POWER SUPPLY									
Operating Voltage Range			-	2.1	2.1	2.1	2.1	V	Min
			-	5.5	5.5	5.5	5.5	V	Max
Power Supply Rejection Ratio	PSRR	V _S = +2.5V to +5.5V V _{CM} = (-V _S) + 0.5V	91	74	72	72	68	dB	Min
Quiescent Current/Amplifier	I _Q	I _{OUT} = 0	470	650	727	750	815	μA	Max
DYNAMIC PERFORMANCE									
Gain-Bandwidth Product	GBP	R _L = 10kΩ, C _L = 100pF	6	-	-	-	-	MHz	Typ
Phase Margin	φ ₀	R _L = 10kΩ, C _L = 100pF	53	-	-	-	-	Degrees	Typ
Full Power Bandwidth	BWP	< 1% distortion, R _L = 600Ω	250	-	-	-	-	kHz	Typ
Slew Rate	SR	G = +1, 2V Step, R _L = 10kΩ	4.2	-	-	-	-	V/μs	Typ
Settling Time to 0.1%	t _s	G = +1, 2V Step, R _L = 600Ω	0.4	-	-	-	-	μs	Typ
Overload Recovery Time		V _{IN} Gain = V _S , R _L = 600Ω	2.5	-	-	-	-	μs	Typ
NOISE PERFORMANCE									
Voltage Noise Density	e _n	f = 1kHz	13	-	-	-	-	nV/ √Hz	Typ
		f = 10kHz	9.5	-	-	-	-	nV/ √Hz	Typ




TYPICAL PERFORMANCE CHARACTERISTICS

At $V_S=5V$, $T_A = +25^\circ C$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.


1. Large-Signal Step Response

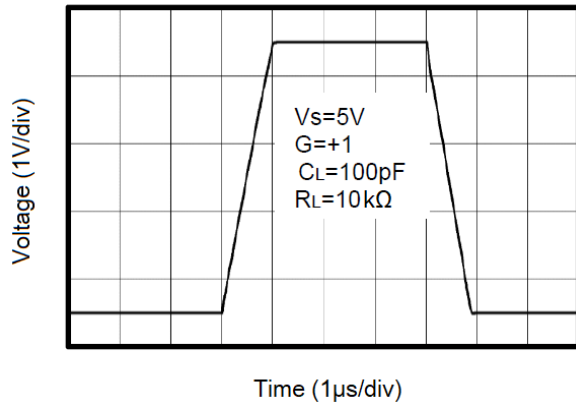


2. Large-Signal Step Response

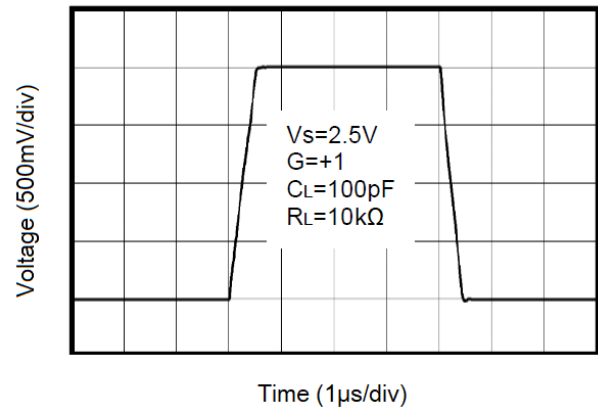


3. Small-Signal Step Response

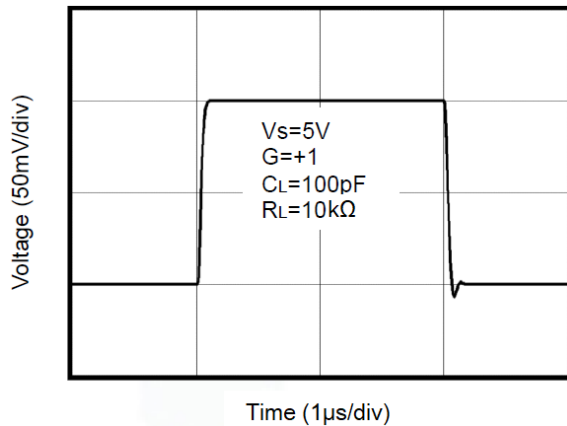


4. Small-Signal Step Response

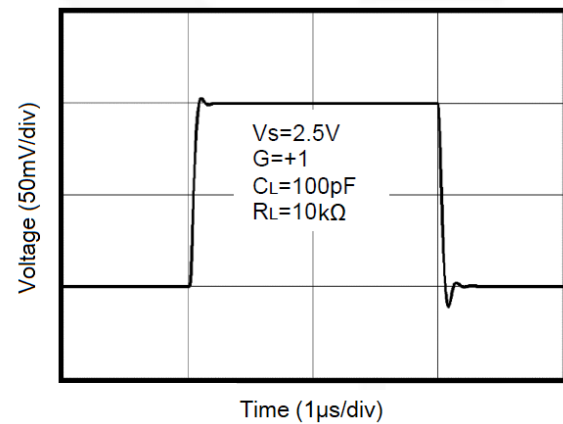

5. Positive Overload Recovery

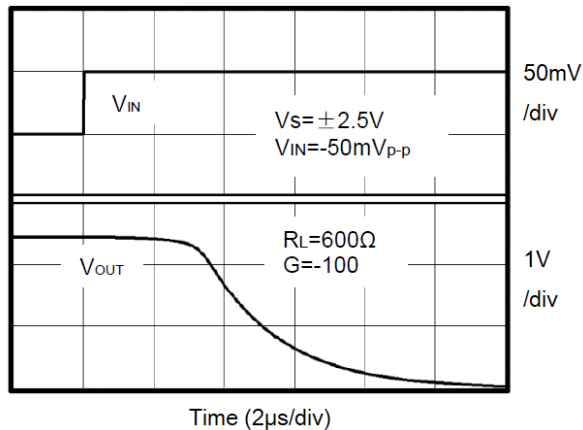


6. Negative Overload Recovery

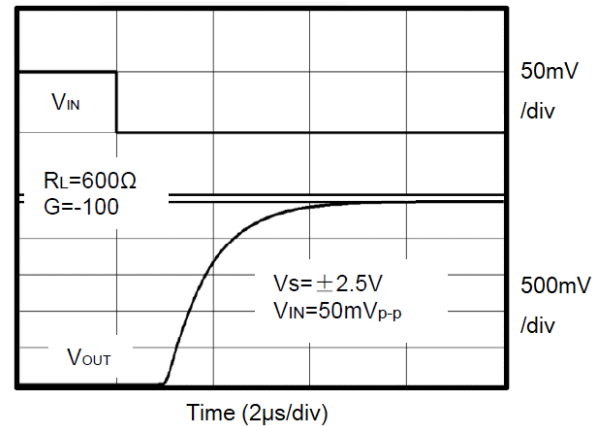





7. Output Voltage Swing vs. Output Current

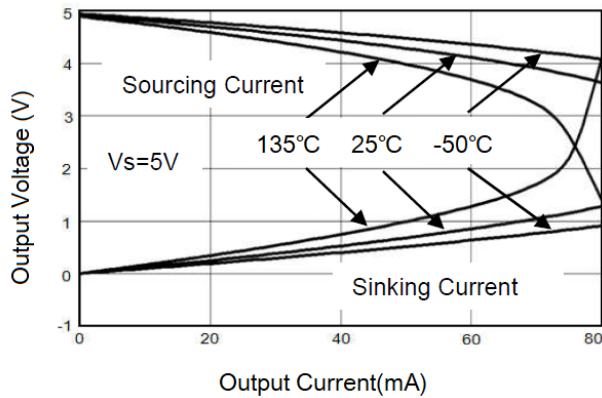


8. Supply Current vs. Temperature

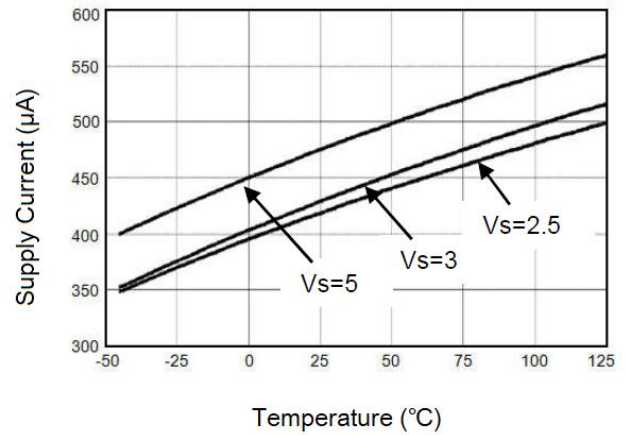


9. Input Voltage Noise Spectral Density vs. Frequency

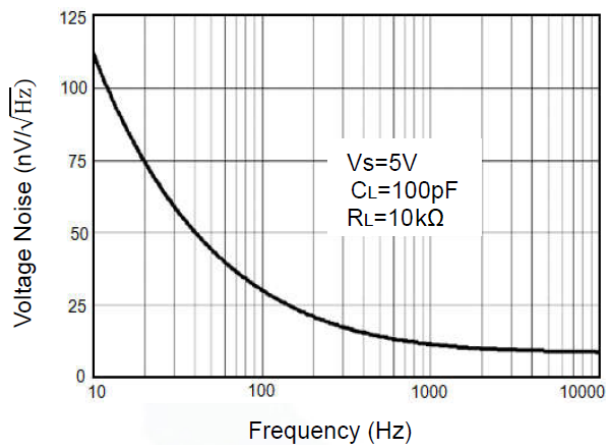


10. Open Loop Gain, Phase Shift vs. Frequency

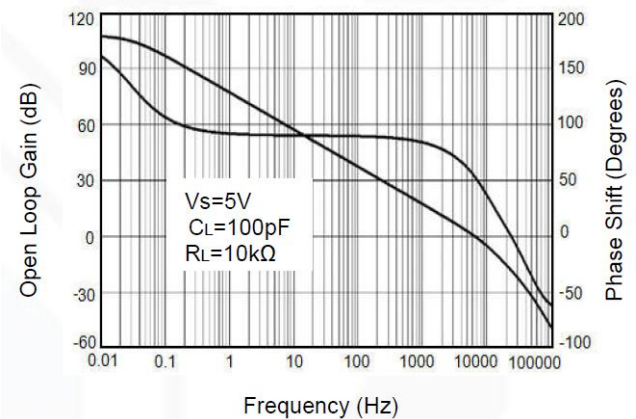

11. CMRR vs. Frequency

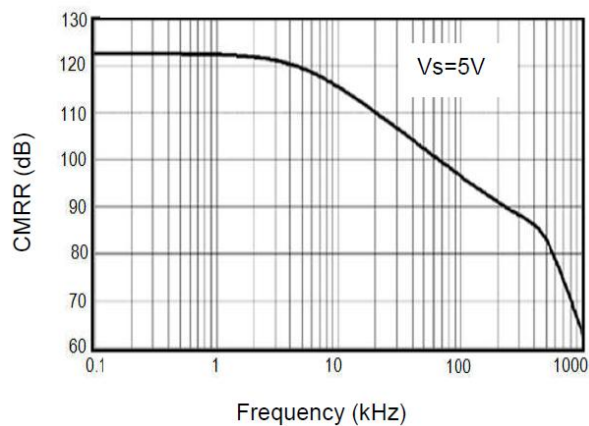

12. PSRR vs. Frequency

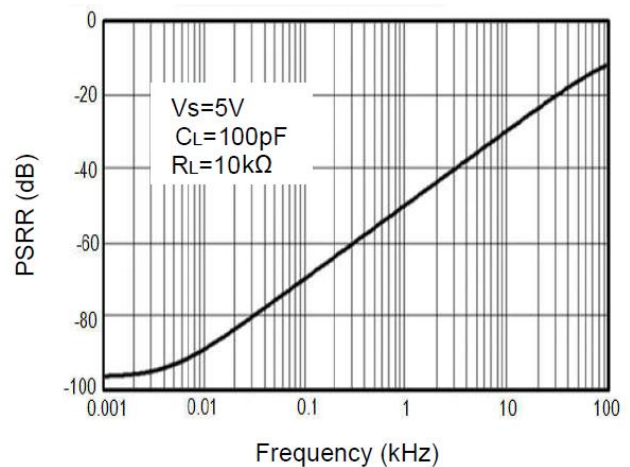



DETAILED INFORMATION

AO1316 op amps is unity-gain stable and suitable for a wide range of general-purpose applications. The small footprints of the AO1316 packages save space on printed circuit boards and enable the design of smaller electronic products.

Power Supply Bypassing and Board Layout

AO1316 operates from a single 2.1V to 5.5V supply or dual $\pm 1.05\text{V}$ to $\pm 2.75\text{V}$ supplies. For best performance, a $0.1\mu\text{F}$ ceramic capacitor should be placed close to the V_{DD} pin in single supply operation. For dual supply operation, both V_{DD} and V_{SS} supplies should be bypassed to ground with separate $0.1\mu\text{F}$ ceramic capacitors.

Low Supply Current

The low supply current (typical $470\mu\text{A}$ per channel) of AO1316 will help to maximize battery life. This is ideal for battery powered systems.

Operating Voltage

AO1316 operate under wide input supply voltage (2.1V to 5.5V). In addition, all temperature specifications apply from -40°C to $+125^{\circ}\text{C}$. Most behavior remains unchanged throughout the full operating voltage range. These guarantees ensure operation throughout the single Li-Ion battery lifetime.

Rail-to-Rail Input

The input common-mode range of AO1316 extends 100mV beyond the supply rails ($V_{\text{SS}}-0.1\text{V}$ to $V_{\text{DD}}+0.1\text{V}$). This is achieved by using complementary input stage. For normal operation, inputs should be limited to this range.

Rail-to-Rail Output

Rail-to-Rail output swing provides maximum possible dynamic range at the output. This is particularly important when operating in low supply voltages. The output voltage of AO1316 can typically swing to less than 2mV from supply rail in light resistive loads ($>100\text{k}\Omega$), and 60mV of supply rail in moderate resistive loads ($10\text{k}\Omega$).



Capacitive Load Tolerance

The AO1316 is optimized for bandwidth and speed, not for driving capacitive loads. Output capacitance will create a pole in the amplifier's feedback path, leading to excessive peaking and potential oscillation. If dealing with load capacitance is a requirement of the application, the two strategies to consider are (1) using a small resistor in series with the amplifier's output and the load capacitance and (2) reducing the bandwidth of the amplifier's feedback loop by increasing the overall noise gain.

Fig 1. shows a unity gain follower using the series resistor strategy. The resistor isolates the output from the capacitance and, more importantly, creates a zero in the feedback path that compensates for the pole created by the output capacitance.

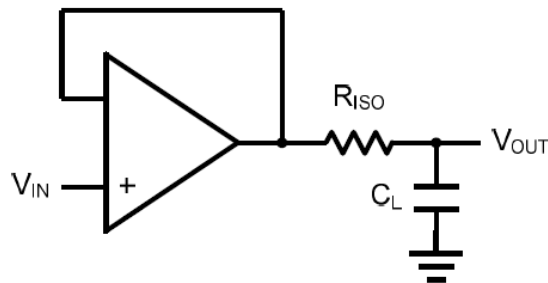


Fig 1. Indirectly Driving a Capacitive Load Using Isolation Resistor

The bigger the R_{ISO} resistor value, the more stable V_{OUT} will be. However, if there is a resistive load R_L in parallel with the capacitive load, a voltage divider (proportional to R_{ISO}/R_L) is formed, this will result in a gain error.

The circuit in Fig 2 is an improvement to the one in Fig 1. R_F provides the DC accuracy by feed-forward the V_{IN} to R_L . C_F and R_{ISO} serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving the phase margin in the overall feedback loop. Capacitive drive can be increased by increasing the value of C_F . This in turn will slow down the pulse response.

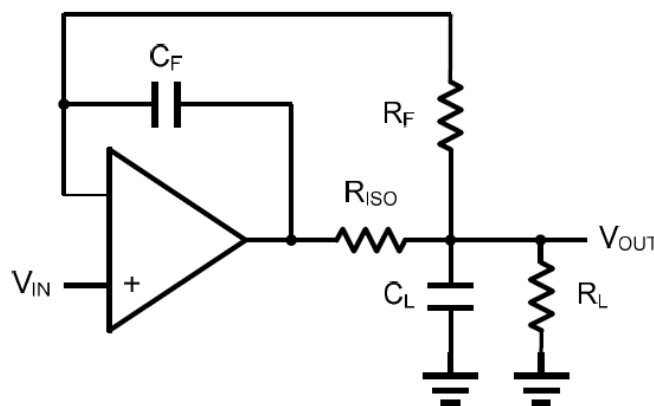


Fig 2. Indirectly Driving a Capacitive Load with DC Accuracy



Typical Application Circuits

Differential amplifier


The differential amplifier allows the subtraction of two input voltages or cancellation of a signal common to the two inputs. It is useful as a computational amplifier in making a differential to single-end conversion or in rejecting a common mode signal. Fig 3. shown the differential amplifier using AO1316.

$$V_{OUT} = \left(\frac{R_1 + R_2}{R_3 + R_4} \right) \frac{R_4}{R_1} V_{IN} - \frac{R_2}{R_1} V_{IP} + \left(\frac{R_1 + R_2}{R_3 + R_4} \right) \frac{R_3}{R_1} V_{REF}$$

If the resistor ratios are equal (i.e. $R_1 = R_3$ and $R_2 = R_4$), then

$$V_{OUT} = \frac{R_2}{R_1} (V_{IP} - V_{IN}) + V_{REF}$$


Fig 3. Differential Amplifier

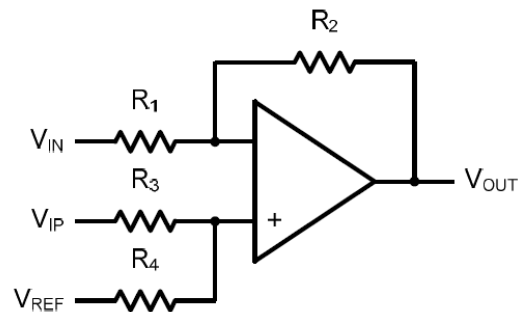

Low Pass Active Filter

The low pass active filter is shown in Fig 4. The DC gain is defined by $-R_2/R_1$. The filter has a -20dB/decade roll-off after its corner frequency $f_c = 1/(2\pi R_3 C_1)$.


Fig 4. Low Pass Active Filter



Instrumentation Amplifier

The triple AO1316 can be used to build a three-op-amp instrumentation amplifier as shown in Fig 5. The amplifier in Figure 5 is a high input impedance differential amplifier with gain of R_2/R_1 . The two differential voltage followers assure the high input impedance of the amplifier.


Fig 5. Instrument Amplifier

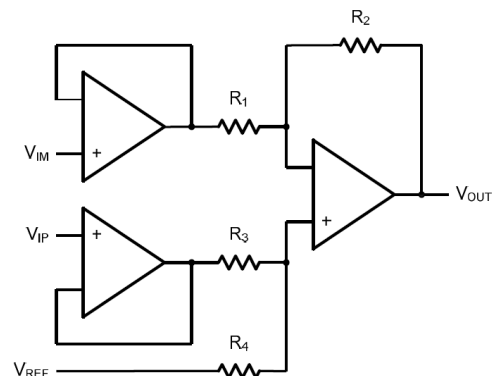



PACKAGE INFORMATION


Dimension in SOT-25 (Unit: mm)

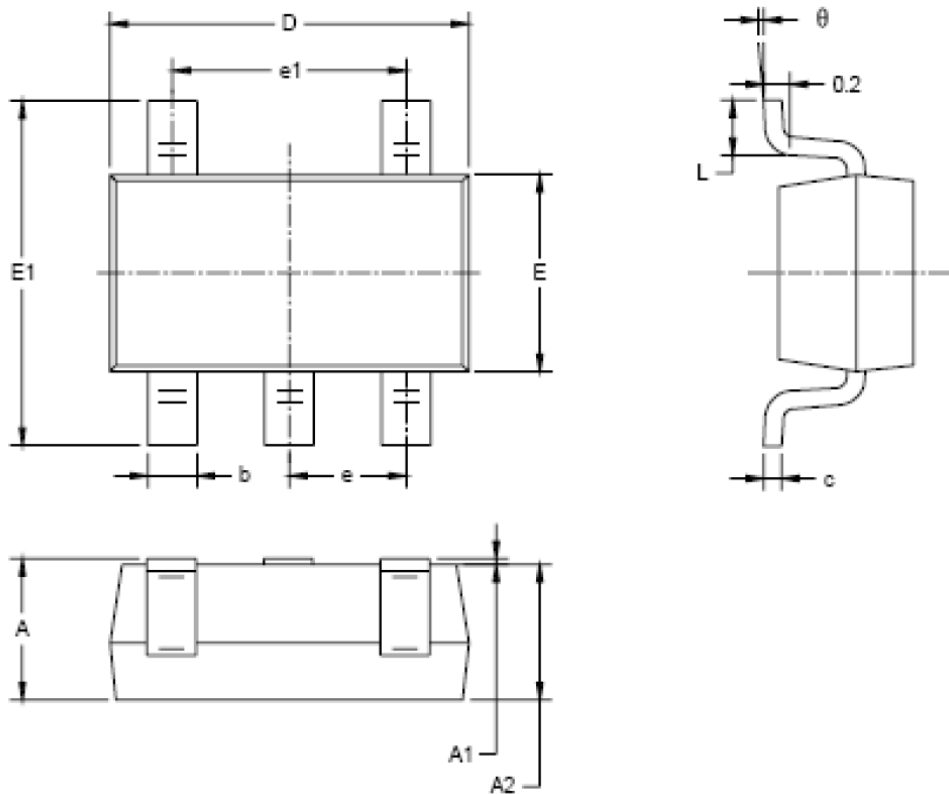

Symbol	Millimeters	
	Min.	Max.
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950 BSC	
e1	1.900 BSC	
L	0.300	0.600
θ	0°	8°



Dimension in SC70-5 (Unit: mm)

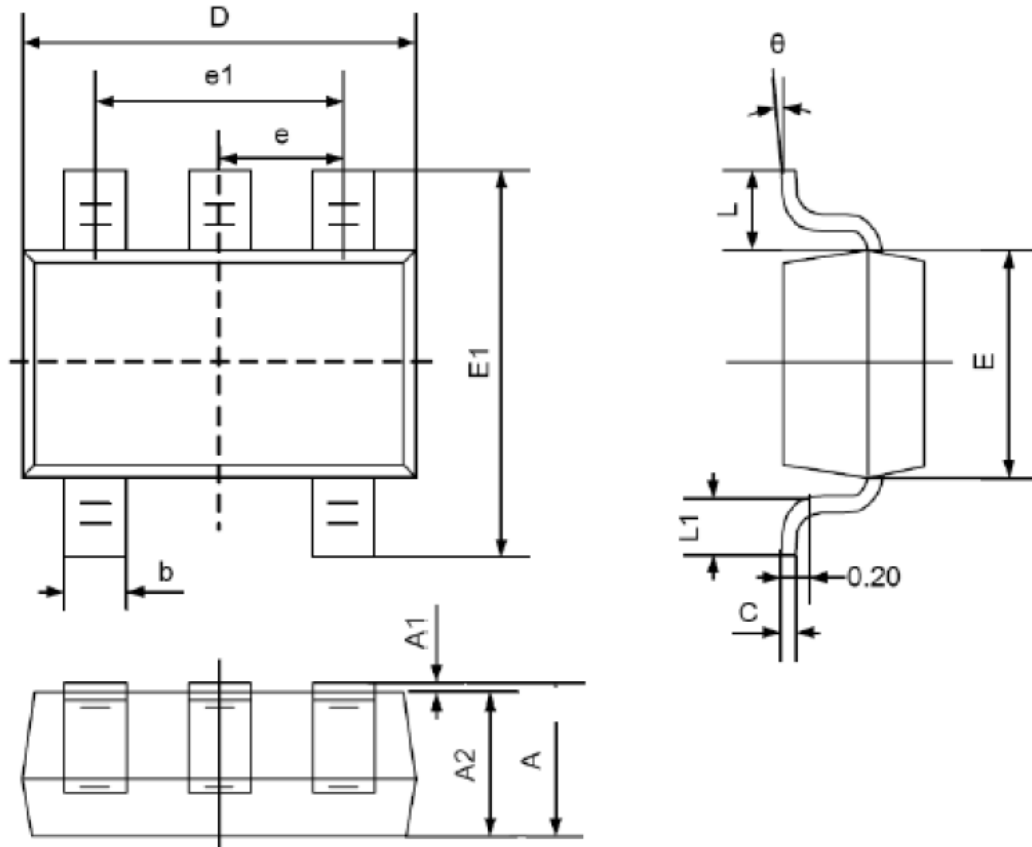

Symbol	Millimeters	
	Min.	Max.
A	0.900	1.100
A1	0.000	0.100
A2	0.900	1.000
b	0.150	0.350
C	0.080	0.150
D	2.000	2.200
E	1.150	1.350
E1	2.150	2.450
e	0.650 TYP	
e1	1.200	1.400
L	0.525 REF	
L1	0.260	0.460
theta	0°	8°



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or servere property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.