



## DESCRIPTION

The 2SC4081X is available in SC-70 package.


## FEATURES

- Low Cob, Cob=2pF(Typ.).
- Epitaxial planar type.
- PNP complement: 2SA1576A
- RoHS Compliant
- Available in SC-70 package

## ORDERING INFORMATION

Package Type	Part Number
SC-70	2SC4081Q
	2SC4081R
	2SC4081S
Note	3,000PCS/Reel
AiT provides all RoHS Compliant Products	

## PIN DESCRIPTION

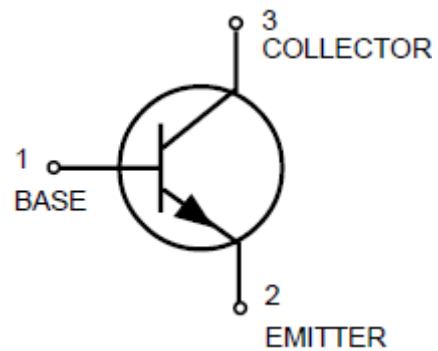



## ABSOLUTE MAXIMUM RATINGS

V <sub>CEO</sub> , Collector-Emitter Voltage	50V
V <sub>CBO</sub> , Collector-Base Voltage	60V
V <sub>EBO</sub> , Emitter-Base Voltage	7.0V
I <sub>C</sub> , Collector Current	150mA <sub>dc</sub>
P <sub>C</sub> , Collector Power Dissipation	0.2W
T <sub>j</sub> , Junction Temperature	150°C
T <sub>stg</sub> , Storage Temperature	-55°C ~ +150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOTE1: P<sub>C</sub> must not be exceeded

h<sub>EF</sub> values are classified as follows:

*	Q	R	S
h <sub>EF</sub>	120~270	180~390	270~560




## ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}$	50	-	-	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 50\mu\text{A}$	7	-	-	V
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 50\mu\text{A}$	60	-	-	V
Collector cutoff current	$I_{CBO}$	$V_{CB} = 60\text{V}$	-	-	0.1	$\mu\text{A}$
Emitter cutoff current	$I_{EBO}$	$V_{EB} = 7\text{V}$	-	-	0.1	$\mu\text{A}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C/I_B = 50\text{mA}/5\text{mA}$	-	-	0.4	V
DC current transfer ratio	$h_{EF}$	$V_{CE} = 6\text{V}, I_C = 1\text{mA}$	120	-	560	-
Transition frequency	$f_T$	$V_{CE} = 12\text{V}, I_E = -2\text{mA},$ $f = 30\text{MHz}$	-	180	-	MHz
Output capacitance	$C_{ob}$	$V_{CB}=12\text{V}, I_E=0\text{A}, f=1\text{MHz}$	-	2.0	3.5	pF




## TYPICAL PERFORMANCE CHARACTERISTICS


1. Grounded emitter propagation characteristics

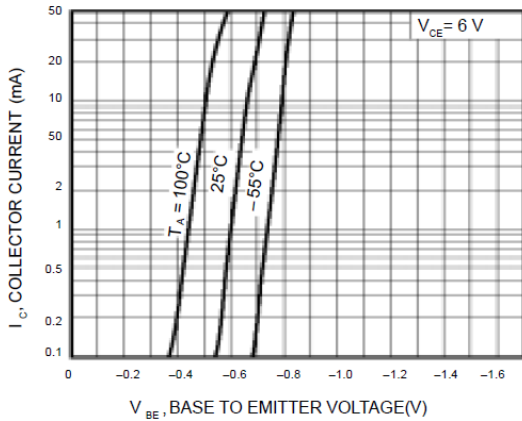


2. Grounded emitter output characteristics(I)

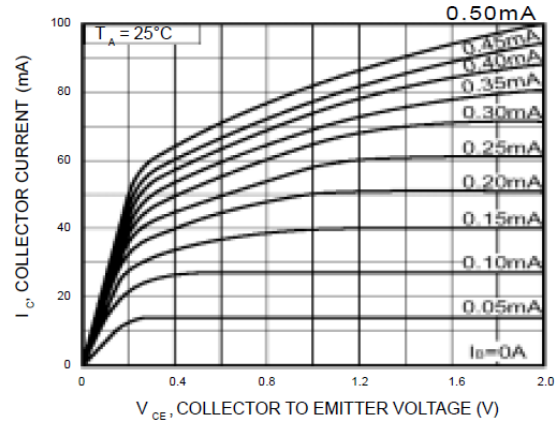


3. Grounded emitter output characteristics(II)

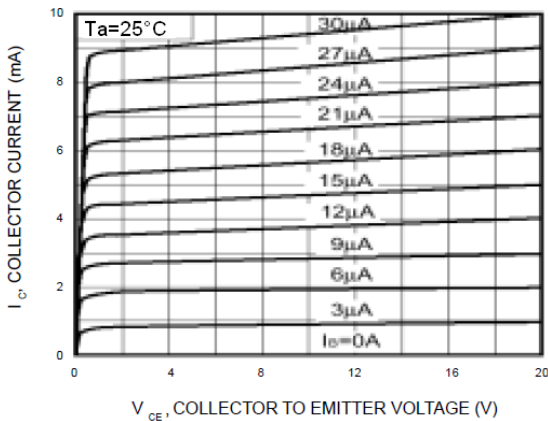


4. DC current gain vs. collector current (I)

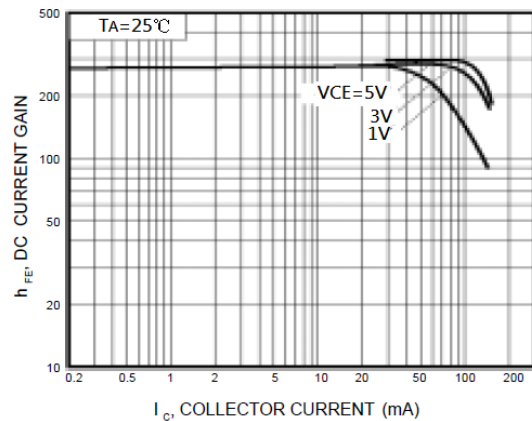

5. DC current gain vs. collector current (II)

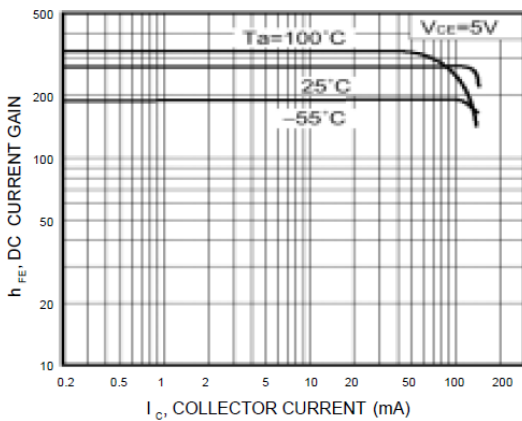


6. Collector-emitter saturation voltage vs. collector current

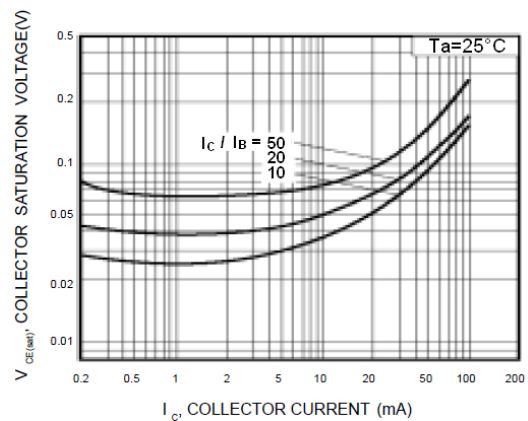





7. Collector-emitter saturation voltage vs. collector current (I)

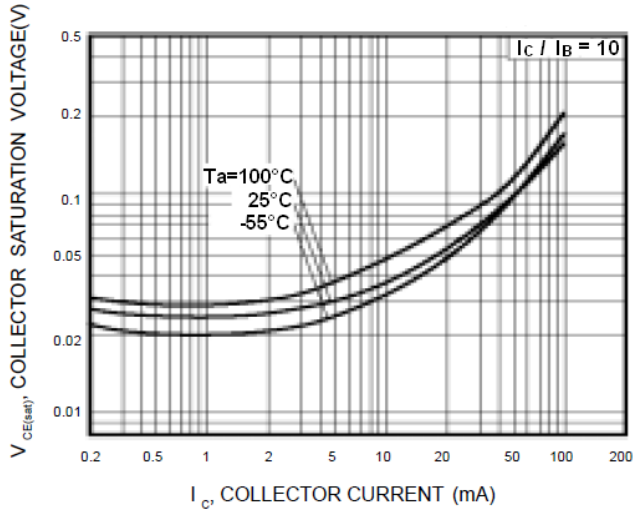


8. Collector-emitter saturation voltage vs. collector current (II)

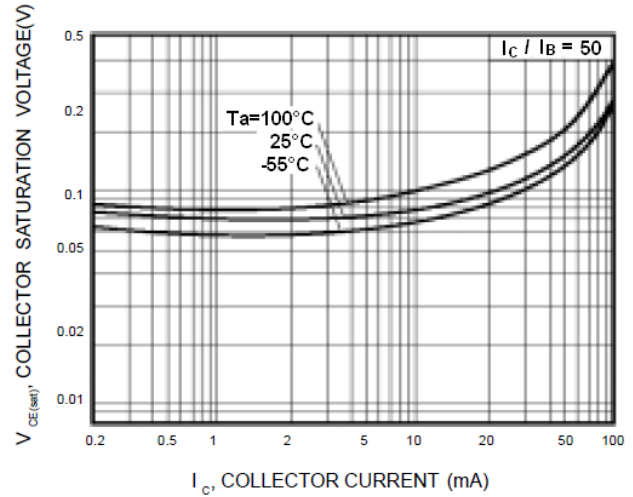


9. Gain bandwidth product vs. emitter current

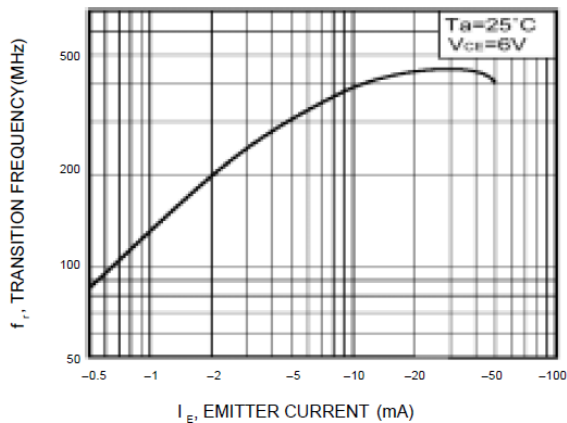

10. Collector output capacitance vs. collector-base voltage  
Emitter input capacitance vs. emitter-base voltage

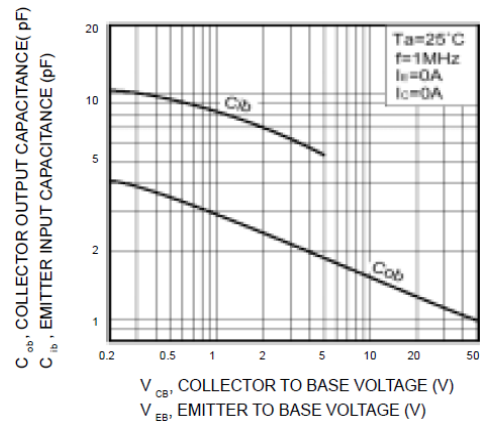


11. Base-collector time constant vs. emitter current

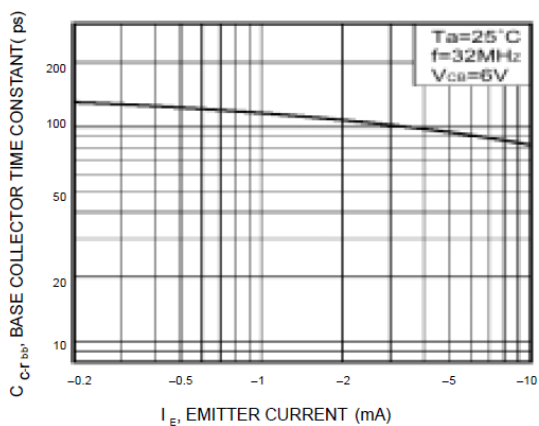



**PACKAGE INFORMATION**

Dimension in SC-70 Package (Unit: mm)

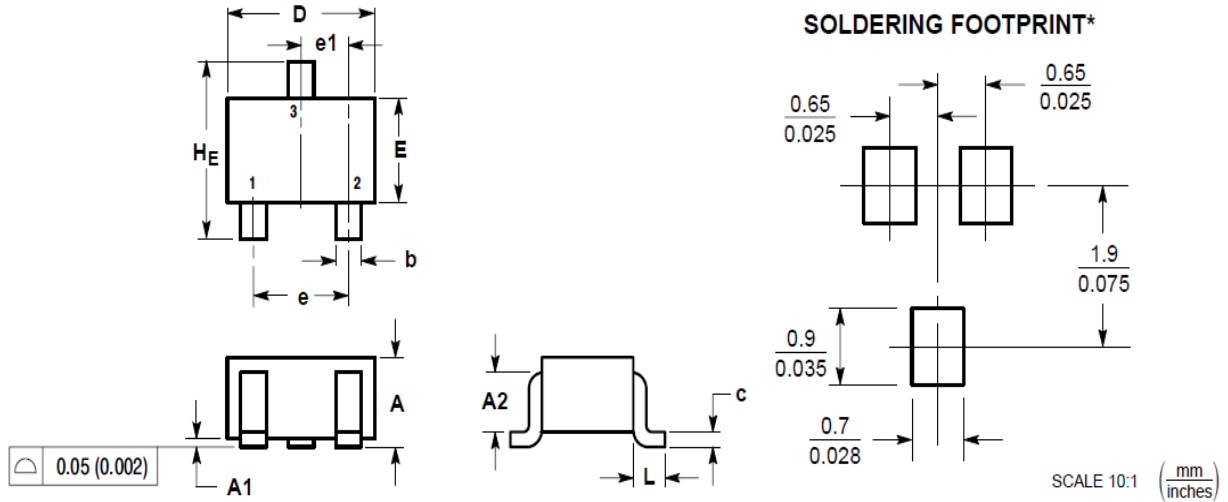

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.00	0.032	0.040
A1	0.00	0.10	0.000	0.004
A2	0.7 REF		0.028 REF	
b	0.30	0.40	0.012	0.016
c	0.10	0.25	0.004	0.010
D	1.80	2.20	0.071	0.087
E	1.15	1.35	0.045	0.053
e	1.20	1.40	0.047	0.055
e1	0.65 BSC		0.026 BSC	
L	0.425 REF		0.017 REF	
He	2.00	2.40	0.079	0.095



## IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.