



## DESCRIPTION

The A317B is an adjustable 3-terminal positive voltage regulator, designed to supply more than 1.5A of output current with voltage adjustable from 1.3V~37V.

The A317B is available in TO220-3, TO-252 and TO-263 Packages.

## ORDERING INFORMATION

Package Type	Part Number	
TO220-3	T3	A317BT3U
		A317BT3VU
TO-252	D	A317BDR
		A317BDVR
TO-263	S	A317BSR
		A317BSVR
Note	V: Halogen free Package R: Tape & Reel U: Tube	
AiT provides all RoHS products		


## FEATURES

- Output current up to 1.5A
- Output voltage adjustable from 1.3V to 37V
- Internal short circuit protection
- Internal over temperature protection
- Safe-Area compensation for output transistor
- Available in TO220-3, TO-252 and TO-263 Packages

## APPLICATION

- PC Motherboard
- LCD Monitor
- Graphic Card
- DVD Player
- Network Interface Card/Switch
- Telecom Equipment
- Printer and other Peripheral Equipment

## TYPICAL APPLICATION

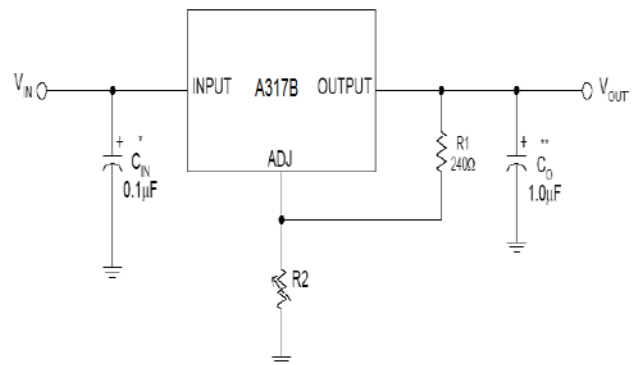

\*= $C_{IN}$  is required if regulator is located near power supply filter.




\*\*= $C_O$  is needed for stability and it improves transient response.

$$V_{OUT} = V_{REF} \times (1 + R2/R1) + I_{ADJ} \times R2$$

Since  $I_{ADJ}$  is controlled to less than 100μA, the error associated with this term is negligible in most applications.



**PIN DESCRIPTION**

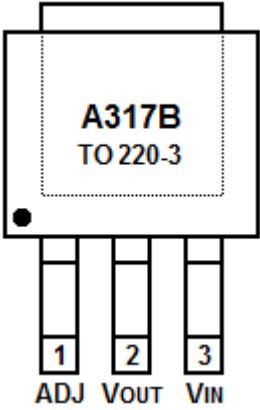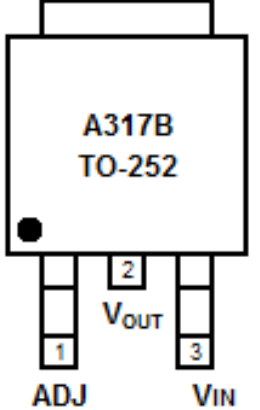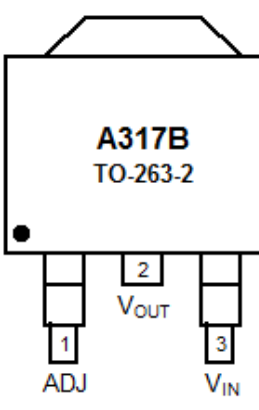 <p style="text-align: center;">Top View</p>	 <p style="text-align: center;">Top View</p>	 <p style="text-align: center;">Top View</p>
Pin #	Symbol	Function
1	ADJ	Adjustable
2	$V_{OUT}$	Output
3	$V_{IN}$	Input



## ABSOLUTE MAXIMUM RATINGS

V <sub>IN</sub> -V <sub>OUT</sub> , Input - Output Voltage Difference	40V
P <sub>D</sub> , Power Dissipation	Internal limited
T <sub>OPR</sub> , Operating Temperature Range	0°C~125°C
T <sub>S</sub> , Storage Temperature	-65°C~150°C
T <sub>LEAD</sub> , Lead Temperature ( soldering, 10 sec)	260°C

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL DATA

Parameter		Symbol	Rating	Units
Junction-to-Ambient	TO-252	$\theta_{JA}$	112	°C/W
	TO-220		54	
	TO-263		64	
Junction-to-Case	TO-252	$\theta_{JC}$	12	°C/W
	TO-220		5	
	TO-263		5	



## ELECTRICAL CHARACTERISTICS

$V_I - V_O = 5V$ ,  $0^\circ C < T_J < 125^\circ C$ ,  $I_O = 500mA$ ,  $I_{MAX} = 1.5A$ ,  $P_{MAX} = 20W$ , unless otherwise specified


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Line Regulation	$\Delta V_O$	$T_A = 25^\circ C$ , $3V \leq V_I - V_O \leq 40V$		0.01	0.04	%V
		$T_A = 0 \sim 125^\circ C$ , $3V \leq V_I - V_O \leq 40V$		0.02	0.07	
Load Regulation	$\Delta V_O$	$T_A = 25^\circ C$	$V_O \leq 6V$	18	25	mV
		$10mA \leq I_O \leq I_{MAX}$	$V_O \leq 5V$	0.4	0.5	%V <sub>O</sub>
		$10mA \leq I_O \leq I_{MAX}$	$V_O \leq 5V$	40	70	mV
			$V_O \leq 6V$	0.8	1.5	%V <sub>O</sub>
Adjustable Pin Current	$I_{ADJ}$		46	100	$\mu A$	
Adjustable Pin Current Change	$\Delta I_{ADJ}$	$2.5V \leq V_I - V_O \leq 40V$ , $10mA \leq I_O \leq I_{MAX}$ , $P_D \leq P_{MAX}$		2.0	5.0	$\mu A$
Reference Voltage	$V_{REF}$	$3V \leq V_I - V_O \leq 40V$ , $10mA \leq I_O \leq I_{MAX}$ , $P_D \leq P_{MAX}$	1.20	1.25	1.30	V
Temperature Stability	STT			0.7		%V <sub>O</sub>
Minimum Load Current for Regulation	$I_{L(MIN)}$	$V_I - V_O = 40V$		3.5	10	mA
Maximum output Current	$I_{O(MAX)}$	$V_I - V_O \leq 15V$ , $P_D \leq P_{MAX}$	1.5	2.2		A
		$V_I - V_O \leq 15V$ , $P_D \leq P_{MAX}$ , $T_A = 25^\circ C$	0.15	0.4		
RMS Noise vs. % of V <sub>OUT</sub>	eN	$T_A = 25^\circ C$ , $10Hz \leq f \leq 10kHz$		0.003	0.01	%V <sub>O</sub>
Ripple Rejection	RR	$V_O = 10V$ , $f = 120Hz$ , $C_{ADJ} = 0$		60		dB
		$V_O = 10V$ , $f = 120Hz$ , $C_{ADJ} = 10\mu F$	66	75		
Long-term Stability, $T_J = T_{HIGH}$	ST	$T_A = 25^\circ C$ , 1000hr		0.3	1	%

NOTE: Testing with low duty pulse should be used to avoid heating effect




## TYPICAL PERFORMANCE CHARACTERISTICS


### 1. Load Regulation

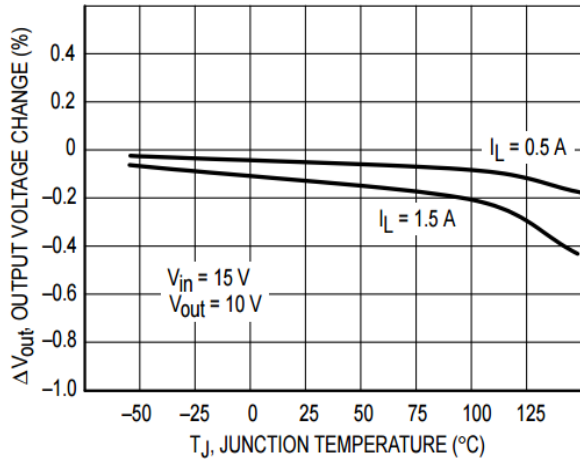


### 2. Adjustment Current vs. Temperature

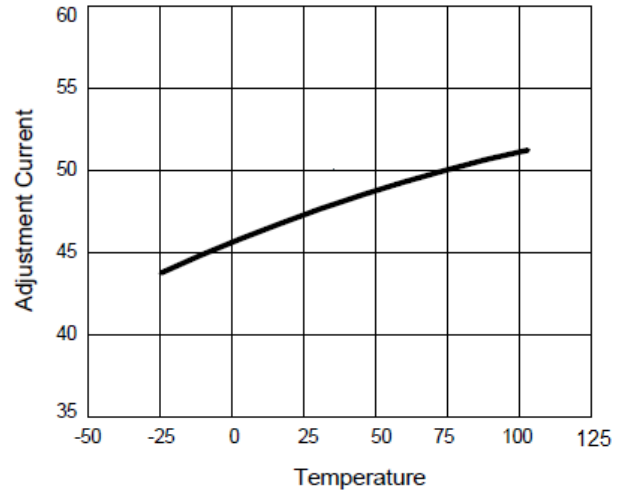

### 3. Dropout Voltage vs. Input-Output Voltage Difference

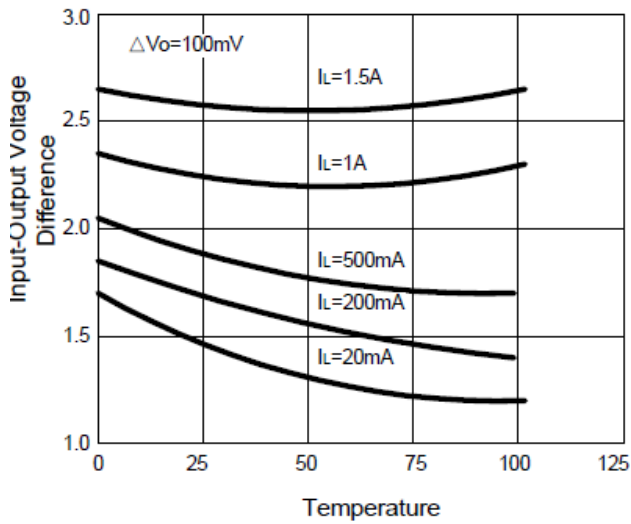


### 4. Reference Voltage vs. Temperature

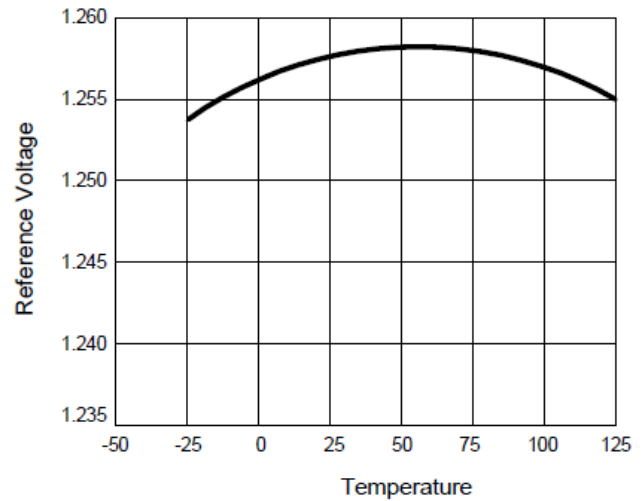




**BLOCK DIAGRAM**

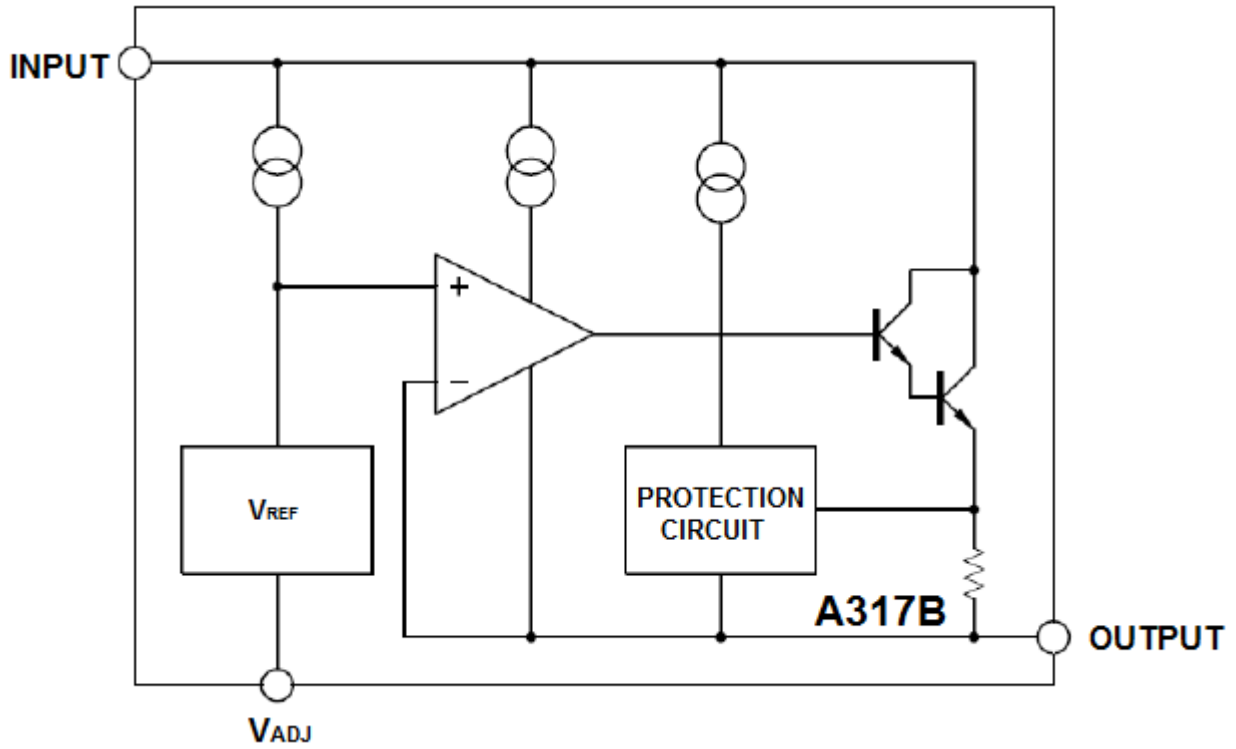




## PACKAGE INFORMATION

Dimension in TO220-3 (Unit: mm)

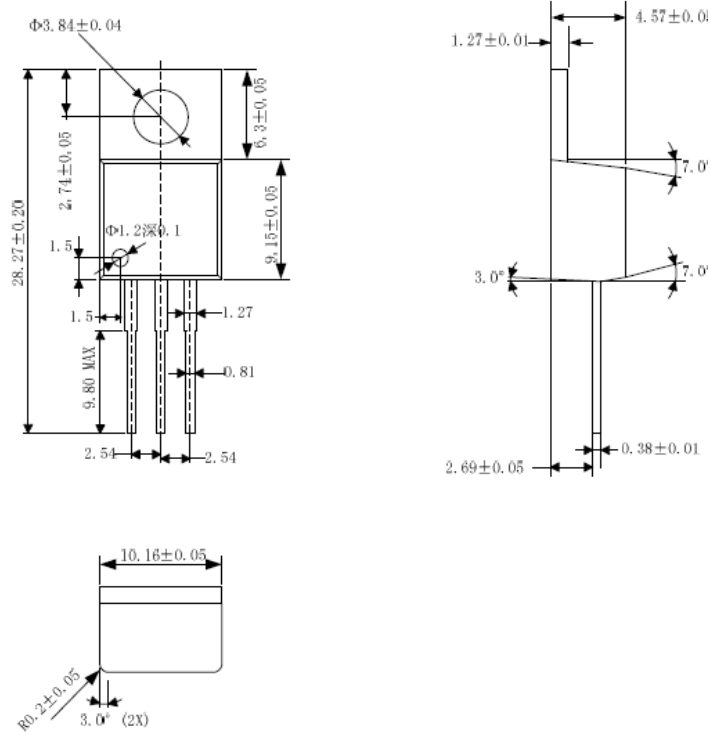


Dimension in TO-252 (Unit: mm)

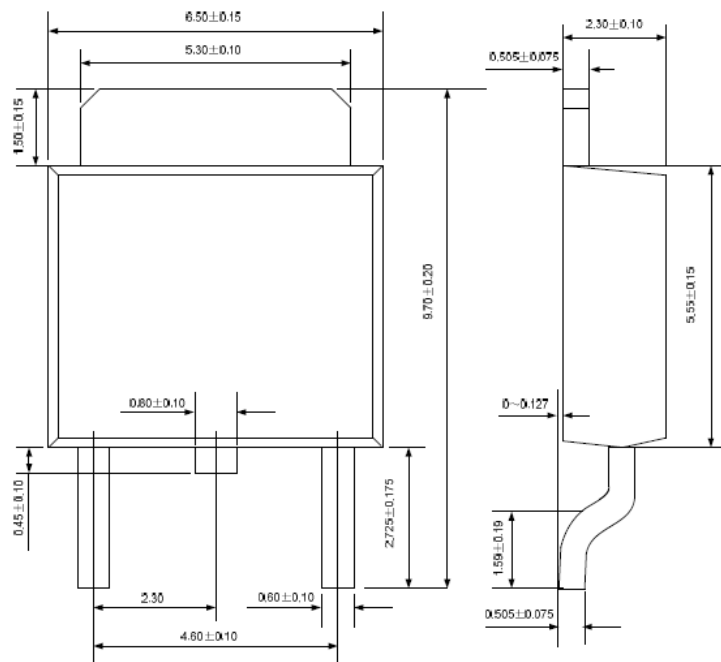



Dimension in TO-263 (Unit: mm)

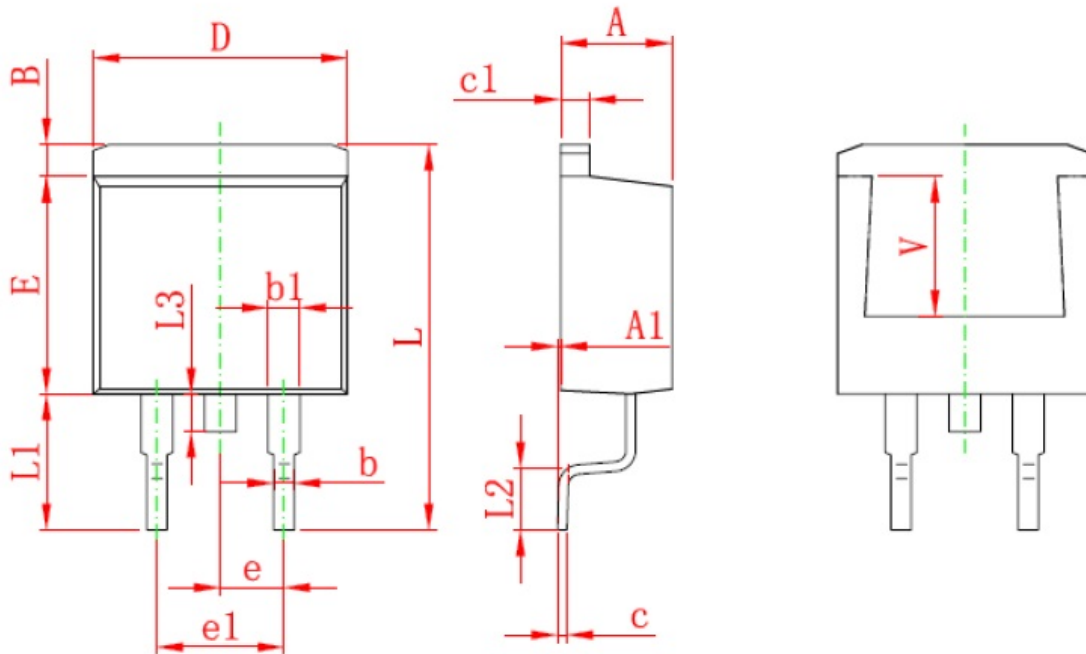

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.170	1.370	0.046	0.054
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
L	15.050	15.450	0.593	0.608
L1	5.080	5.480	0.200	0.216
L2	2.340	2.740	0.092	0.108
L3	1.300	1.700	0.051	0.067
V	5.600 REF		0.220 REF	





## IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.