



DESCRIPTION

The RB521S-40 is available in SOD-523 package

FEATURES

- Low V_F .
- Silicon epitaxial planar
- Extremely small surface mounting type.
- Available in SOD-523 package


ORDERING INFORMATION

Package Type	Part Number
SOD-523	RB521S-40
Note	SPQ: 3,000pcs/Reel
AiT provides all RoHS Compliant Products	

APPLICATIONS

- Low current rectification and high speed switching

PIN DESCRIPTION





ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$

V_R , DC Reverse Voltage	40V
I_O , Mean Rectifying Current	200mA
I_{FSM} , Peak Forward Surge Current ^{NOTE1}	4A
T_J , Junction Temperature	125°C
T_{STG} , Storage Temperature	-55°C~+125°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOTE1:60Hz for 1 ∞

ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ$

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=10\text{mA}$	0.16	-	0.30	V
		$I_F=100\text{mA}$	0.31	-	0.45	
		$I_F=200\text{mA}$	0.37	-	0.52	
Reverse Current	I_R	$V_R=10\text{V}$	-	-	20	μA
		$V_R=40\text{V}$	-	-	90	
ESD Break Down Voltage	ESD	C=100pF, R=1.5kohm forward and reverse 1 time	8	-	-	kV



ELECTRICAL CHARACTERISTIC CURVES

Figure 1. I_F vs. V_F

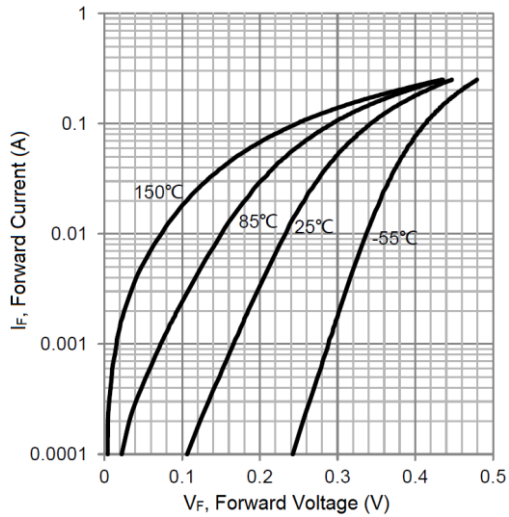


Figure 2. I_R vs. V_R


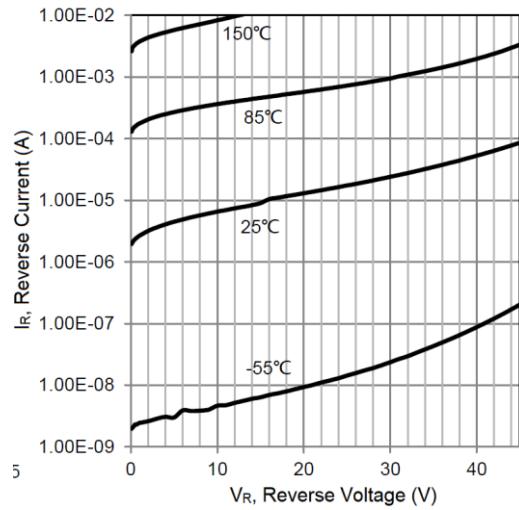





Figure 3. C_T vs. V_R



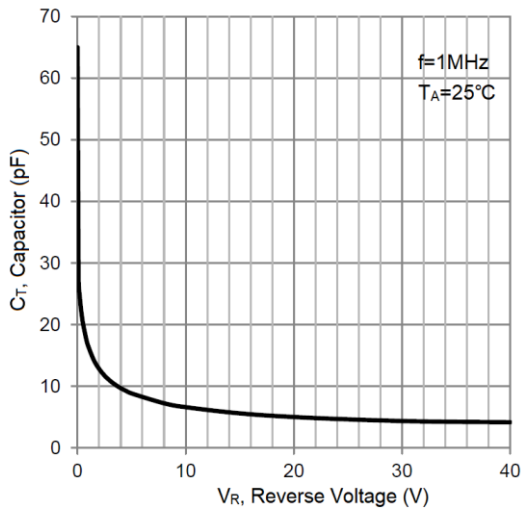


PACKAGE INFORMATION

Dimension in SOD-523 Package (Unit: mm)

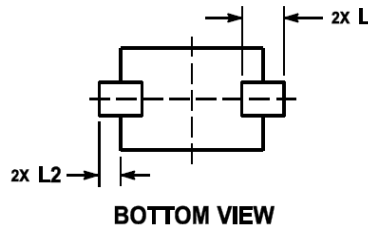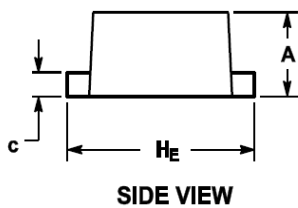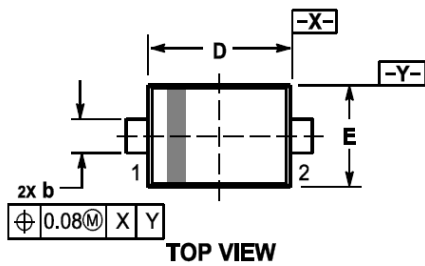

SOLDERING FOOTPRINT

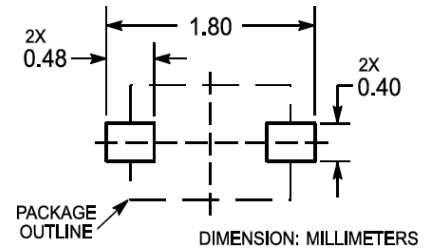

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.50	0.70	0.020	0.028
b	0.25	0.35	0.010	0.014
c	0.07	0.20	0.003	0.008
D	1.10	1.30	0.043	0.051
E	0.70	0.90	0.028	0.035
HE	1.50	1.70	0.059	0.067
L	0.30 REF		0.012 REF	
L2	0.15	0.25	0.006	0.010



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.