



**DESCRIPTION**

The A78L05 is fix 5V monolithic integrated circuit voltage regulators are suitable for applications that required supply current up to 100mA.

The A78L05 is available in SOT-23, SOT89-3 and TO-92 packages.


**FEATURES**

- Maximum Output current: 0.1A
- Output Voltage: 5V
- Thermal Overload Protection
- Short-Circuit Current Limiting
- Output Voltage offered in  $\pm 5\%$  Tolerance
- Available in SOT-23, SOT89-3 and TO-92 packages

**ORDERING INFORMATION**

| Package Type  | Part Number  |            |
|---|--|------------|
| SOT-23<br>SPQ: 3,000pcs/Reel                          | E3   | A78L05E3R  |
|   |  | A78L05E3VR |
| SOT89-3<br>SPQ: 1,000pcs/Reel                         | K3   | A78L05K3R  |
|   |  | A78L05K3VR |
| TO-92<br>A: SPQ: 2,000pcs/Box<br>B: SPQ: 1,000pcs/Bag | Z  | A78L05ZY   |
|   |  | A78L05ZVY  |
| Note  | V: Halogen free Package<br>R: Tape & Reel<br>Y: Ammo or Bulk<br>A: Ammo Packing<br>B: Bulk Packing |            |
| AiT provides all RoHS products                        |  |            |

**APPLICATION CIRCUIT**

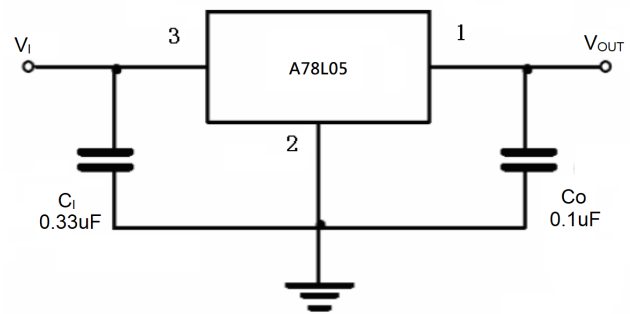

NOTE: Bypass capacitors  $C_o$  of at least 0.1uF are recommended for optimum stability and transient response. It should be located as close as possible (recommended to be less than 10mm) to the regulators.



**PIN DESCRIPTION**

| <p style="text-align: center;">Top View</p> |         |       | <p style="text-align: center;">Top View</p> |          |  | <p style="text-align: center;">Top View</p> |  |  |
|---|---------|-------|---|----------|--|---|--|--|
| Pin #                                       |         |       | Symbol                                      | Function |  |   |  |  |
| SOT-23                                      | SOT89-3 | TO-92 |   |          |  |   |  |  |
| 1   | 1       | 1     | OUT   | Output   |  |   |  |  |
| 2   | 3       | 3     | IN  | Input    |  |   |  |  |
| 3   | 2       | 2     | GND   | Ground   |  |   |  |  |



**ABSOLUTE MAXIMUM RATINGS**

T<sub>A</sub>=25°C

|  |          |                |
|--|----------|----------------|
| V <sub>I</sub> , Input Voltage                         |          | 30V            |
| P <sub>D</sub> , Power Dissipation                     | SOT-23   | 350mW          |
|  | SOT-89-3 | 500mW          |
|  | TO-92    | 625mW          |
| T <sub>OPR</sub> , Operating ambient Temperature Range | SOT-23   | 0°C ~ +125°C   |
|  | SOT-89-3 | -25°C ~ +125°C |
|  | TO-92    | -25°C ~ +125°C |
| T <sub>STG</sub> , Storage Temperature Range           |          | -55°C ~ +150°C |

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**ELECTRICAL CHARACTERISTICS**

V<sub>I</sub>=10V, I<sub>O</sub>=40mA, -30<T<sub>J</sub><85°C, C<sub>1</sub>=0.33μF, C<sub>O</sub>=0.1μF<sup>NOTE1</sup>, unless otherwise noted


| Parameter                   | Symbol          | Conditions   | Min. | Typ. | Max. | Unit |
|-----------------------------|-----------------|--|------|------|------|------|
| Output Voltage              | V <sub>O</sub>  | T <sub>J</sub> =25°C   | 4.80 | 5    | 5.20 | V    |
|                             |                 | 7V≤V <sub>I</sub> ≤20V; I <sub>O</sub> =1mA~40mA               | 4.75 | -    | 5.25 | V    |
|                             |                 | 7V≤V <sub>I</sub> ≤V <sub>max</sub> ; I <sub>O</sub> =1mA~70mA | 4.75 | -    | 5.25 | V    |
| Load Regulation             | ΔV <sub>O</sub> | V <sub>IN</sub> =10V; I <sub>O</sub> =1mA~100mA                | -60  | -    | 60   | mV   |
|                             |                 | V <sub>IN</sub> =10V; I <sub>O</sub> =1mA~40mA                 | -30  | -    | 30   |      |
| Line Regulation             | ΔV <sub>O</sub> | I <sub>OUT</sub> =40mA; 7V≤V <sub>I</sub> ≤20V                 | -150 | -    | 150  | mV   |
|                             |                 | I <sub>OUT</sub> =40mA; 8V≤V <sub>I</sub> ≤20V                 | -100 | -    | 100  |      |
| Quiescent Current           | I <sub>q</sub>  |  | -    | -    | 5.5  | mA   |
| Quiescent Current Change    | ΔI <sub>q</sub> | 8V≤V <sub>I</sub> ≤20V   | -1.5 | -    | 1.5  | mA   |
|                             |                 | 1mA≤I <sub>O</sub> ≤40mA                                       | -0.1 | -    | 0.1  |      |
| Ripple Rejection            | RR              | 10V≤V <sub>I</sub> ≤20V; f=120Hz;<br>T <sub>J</sub> =25°C      | 40   | -    | -    | dB   |
| Dropout Voltage             | V <sub>d</sub>  | T <sub>J</sub> =25°C   | -    | 2.2  | -    | V    |
| Short Circuit Current Limit | I <sub>sc</sub> | T <sub>J</sub> =25°C   | -    | 0.41 | -    | V    |

NOTE1: The Maximum steady state usable output current and input voltage are very dependent on the heating sinking and/or lead temperature length of the package. The data above represent pulse test conditions with junction temperatures as indicated at the initiation of test.




## TYPICAL PERFORMANCE CHARACTERISTICS


### 1. Output Characteristics

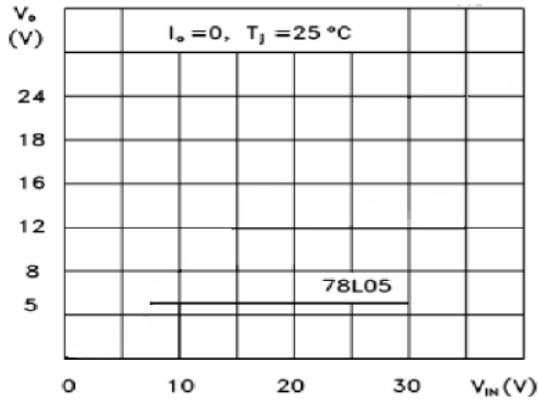


### 2. Load Characteristics

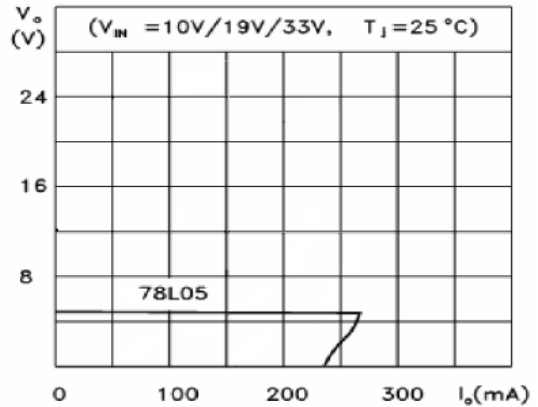


### 3. Thermal Shutdown

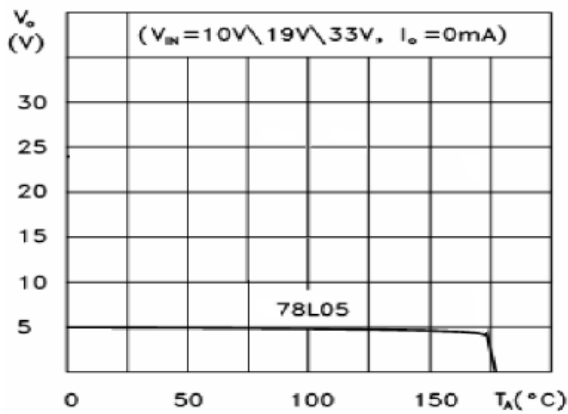


### 4. Short Circuit Output Current

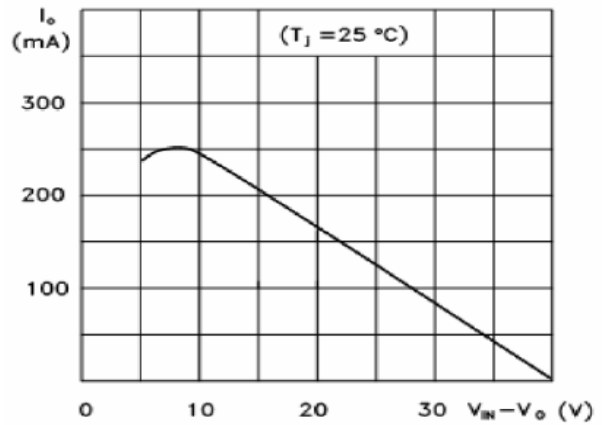

### 5. Quiescent Current vs. Input Voltage

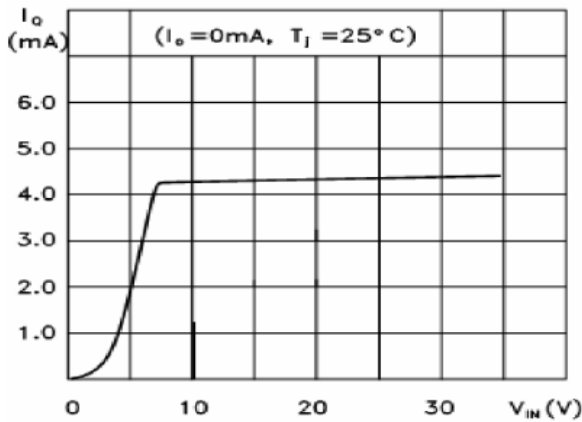


### 6. Dropout Characteristics

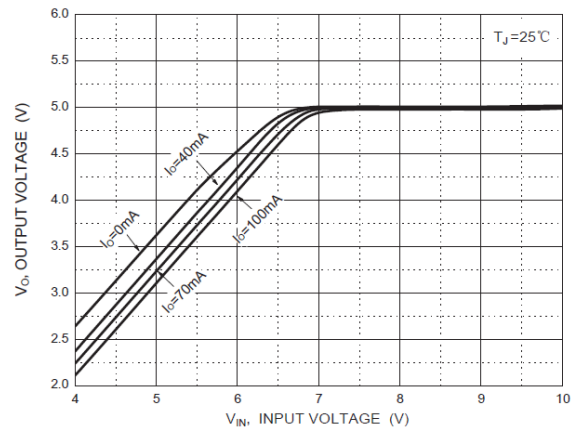





7. Quiescent Current vs. Input Voltage

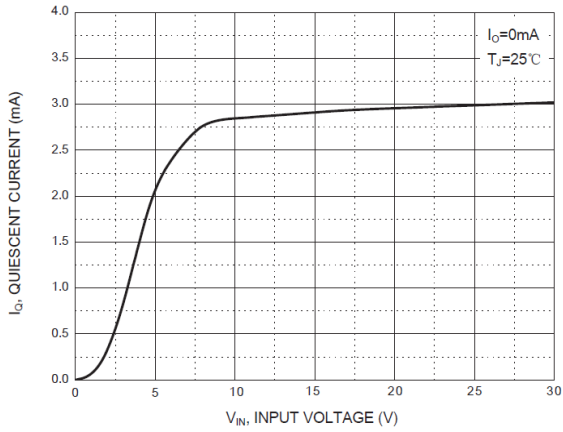

8. Current Cut-off Grid Voltage

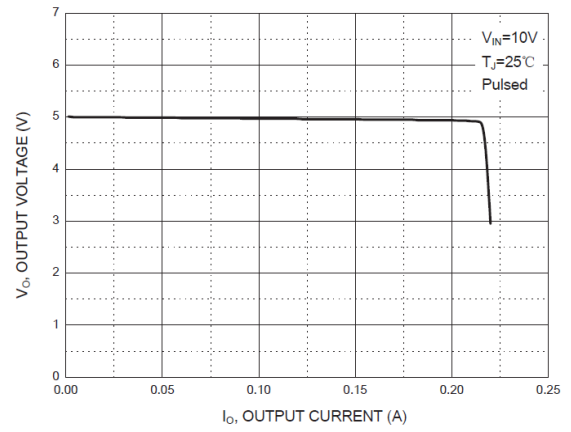


9. Output Voltage vs. Junction Temperature

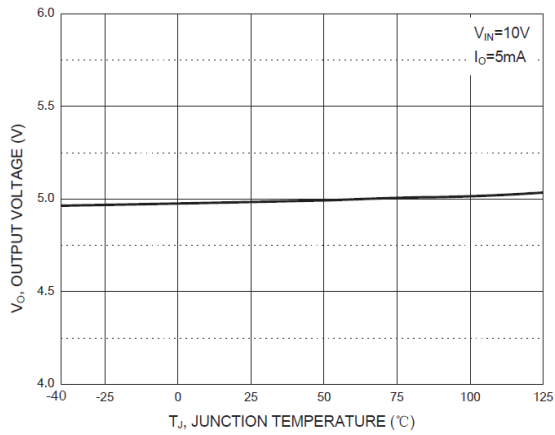



**PACKAGE INFORMATION**


Dimension in SOT-23 (Unit: mm)

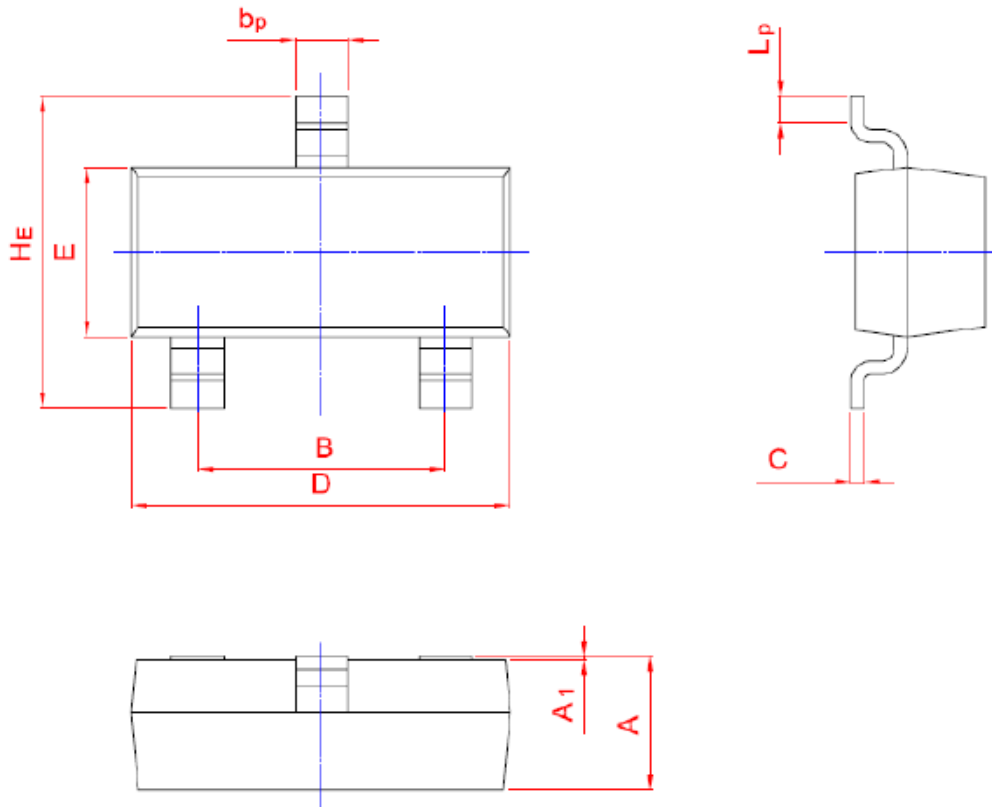

| Symbol         | Min.  | Max.  |
|----------------|-------|-------|
| A              | 0.95  | 1.40  |
| B              | 1.78  | 2.04  |
| bp             | 0.35  | 0.50  |
| C              | 0.08  | 0.19  |
| D              | 2.70  | 3.10  |
| E              | 1.20  | 1.65  |
| HE             | 2.20  | 3.00  |
| A <sub>1</sub> | 0.013 | 0.100 |
| L <sub>p</sub> | 0.20  | 0.50  |




Dimension in SOT89-3 Package (Unit: mm)

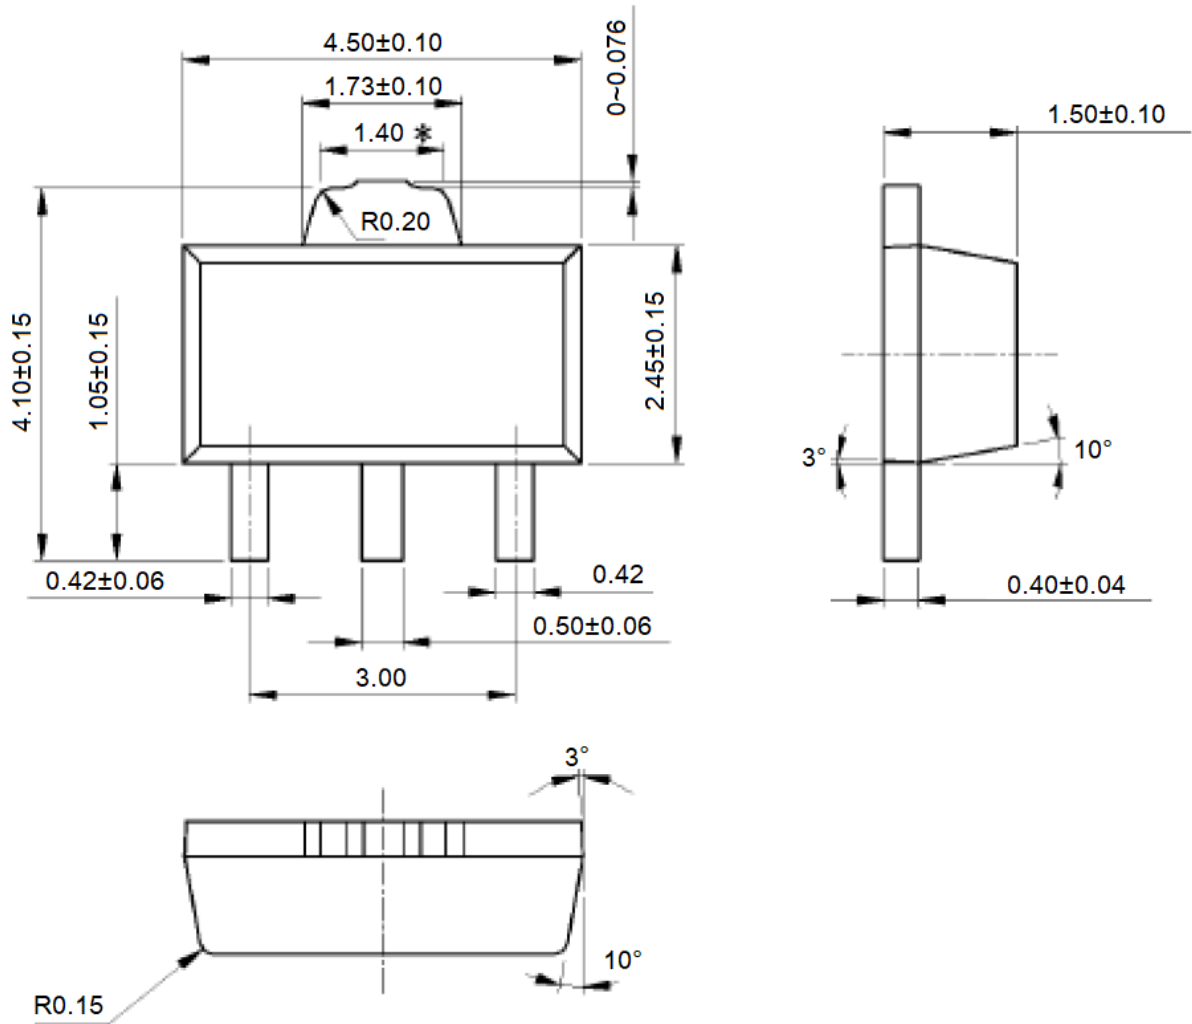



Dimension in TO-92 Package (Unit: mm)

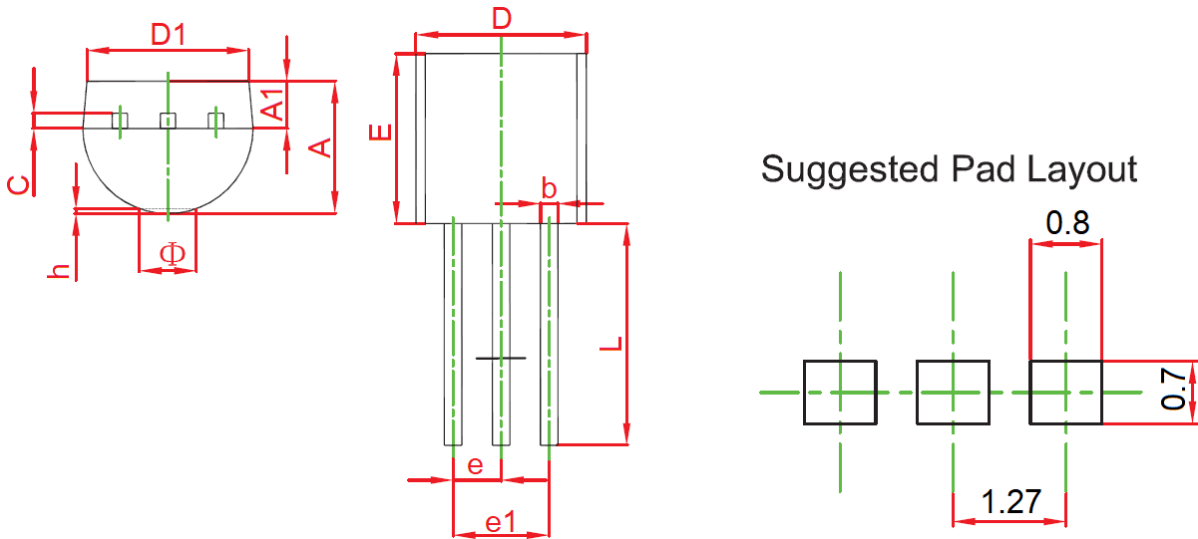

| Symbol | Millimeters |        |
|--------|-------------|--------|
|        | Min         | Max    |
| A      | 3.300       | 3.700  |
| A1     | 1.100       | 1.400  |
| b      | 0.380       | 0.550  |
| C      | 0.360       | 0.510  |
| D      | 4.400       | 4.700  |
| D1     | 3.430       | -      |
| E      | 4.300       | 4.700  |
| e      | 1.270 TYP   |        |
| e1     | 2.440       | 2.640  |
| L      | 14.100      | 14.500 |
| Φ      | -           | 1.600  |
| h      | 0.000       | 0.380  |





## **IMPORTANT NOTICE**

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.