



## DESCRIPTION

A1117B is a series of low-dropout three-terminal regulators with a typical dropout of 1.2V at 1A load current.

Besides the fixed voltage version ( $V_{OUT} = 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5V$ ), A1117B has an adjustable version that can provide an output voltage from 1.25 to 12V with two external resistors.

A1117B offers thermal shutdown functions to assure the stability of the chip and power system. The trimming technique is used to guarantee output voltage accuracy within  $\pm 2\%$ .

The A1117B is available in SOT-223, TO-252, and SOT89-3 packages.

## APPLICATION

- Battery Chargers
- Consumer and Industrial Equipment Point of Regulation
- Computer Motherboard, Graphic Card
- Switching Power Supply Post Regulation
- Hard Drive Controllers, DVD Decode Board
- ADSL Modem


## ORDERING INFORMATION

Package Type	Part Number	
SOT-223 SPQ: 2,500pcs/Reel	N	A1117BNR-XX
TO-252 SPQ: 2,500pcs/Reel	D	A1117BDR-XX
SOT89-3 SPQ: 1,000pcs/Reel	K3	A1117BK3R-XX
Note	XX: Output Voltage, 12=1.2V, 15=1.5V, 18=1.8V, 25= 2.5V, 33=3.3V, 50=5.0V ADJ= Adjustable R: Tape & Reel	
AiT provides all RoHS products		


## FEATURES

- Maximum Output Current is 1A
- Range of Operation Input Voltage: Max 18V
- Standby Current: 5mA (Typ.)
- Line Regulation: 1.5%/V (Typ.)  
( $V_{OUT}=1.2V$  is 2%)
- Load Regulation: 6mV (Typ.)
- Compatible with Tantalum Capacitor, Electrolytic Capacitor and MLCC
- Operation Temperature:  $-40^{\circ}C \sim 85^{\circ}C$
- Available in SOT-223, TO-252, and SOT89-3 Packages.

## TYPICAL APPLICATION

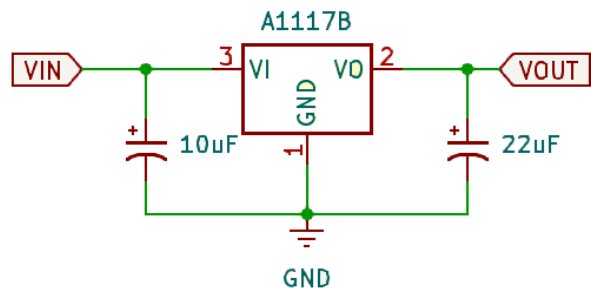

A1117B fixed Version

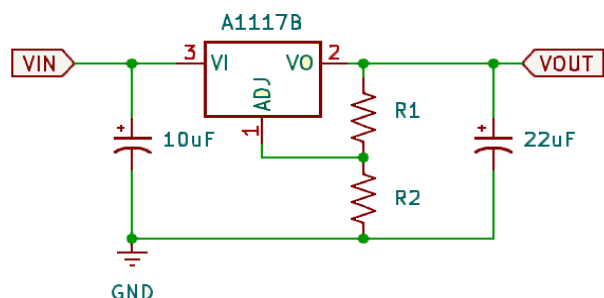

A1117B ADJ Version



## PIN DESCRIPTION

A1117B-XX  
SOT-223

1 2 3

GND/ADJ  $V_{OUT}$   $V_{IN}$

SOT-223, N  
Top View

A1117B-XX  
TO-252

1 2 3

GND/ADJ  $V_{OUT}$   $V_{IN}$

TO-252, D  
Top View

A1117B-XX  
SOT-89-3

1 2 3

GND/ADJ  $V_{OUT}$   $V_{IN}$

SOT-89-3, K3  
Top View

Pin #	SOT-223		TO-252		SOT89-3	
	A1117B -XX	A1117B -ADJ	A1117B -XX	A1117B -ADJ	A1117B -XX	A1117B -ADJ
1	GND	ADJ	GND	ADJ	GND	ADJ
2	$V_{OUT}$	$V_{OUT}$	$V_{OUT}$	$V_{OUT}$	$V_{OUT}$	$V_{OUT}$
3	$V_{IN}$	$V_{IN}$	$V_{IN}$	$V_{IN}$	$V_{IN}$	$V_{IN}$

## ABSOLUTE MAXIMUM RATINGS

Max Input Voltage	20V
$T_J$ , Max Operating Junction Temperature	150°C
$T_A$ , Ambient Temperature	-40°C ~ 85°C
Package Thermal Resistance	SOT-223 20°C/W
	TO-252 10°C/W
$T_S$ , Storage Temperature	-40°C ~ 125°C
Lead Temperature & Time	260°C, 10s

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## RECOMMENDED WORKING CONDITIONS

Parameter	Symbol	Value	Units
Input Voltage Range		Max. 18	V
Operating Junction Temperature	$T_J$	-20 ~ 125	°C



## ELECTRICAL CHARACTERISTICS

T<sub>J</sub> = 25°C

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Reference Voltage	V <sub>REF</sub>	10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 3.25V	ADJ	1.225	1.25	1.270	V
Output Voltage	V <sub>OUT</sub>	0 ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 3.2V	1.2V	1.152	1.20	1.248	V
		0 ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 3.5V	1.5V	1.477	1.50	1.522	
		0 ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 3.8V	1.8V	1.746	1.80	1.854	
		0 ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 4.5V	2.5V	2.450	2.50	2.550	
		0 ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 5.3V	3.3V	3.234	3.30	3.366	
		0 ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> = 7.0V	5.0V	4.90	5.00	5.10	
Line Regulation	ΔV <sub>OUT</sub>	I <sub>OUT</sub> = 10mA, 2.75V ≤ V <sub>IN</sub> ≤ 12V	ADJ	-	3	7	mV
		I <sub>OUT</sub> = 10mA, 2.7V ≤ V <sub>IN</sub> ≤ 10V	1.2V				
		I <sub>OUT</sub> = 10mA, 3V ≤ V <sub>IN</sub> ≤ 12V	1.5V				
		I <sub>OUT</sub> = 10mA, 3.3V ≤ V <sub>IN</sub> ≤ 12V	1.8V				
		I <sub>OUT</sub> = 10mA, 4.0V ≤ V <sub>IN</sub> ≤ 12V	2.5V				
		I <sub>OUT</sub> = 10mA, 4.8V ≤ V <sub>IN</sub> ≤ 12V	3.3V				
Load Regulation	ΔV <sub>OUT</sub>	I <sub>OUT</sub> = 10mA, 6.5V ≤ V <sub>IN</sub> ≤ 12V	5.0V	-	6	12	mV
		V <sub>IN</sub> = 2.75V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	ADJ				
		V <sub>IN</sub> = 2.7V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	1.2V				
		V <sub>IN</sub> = 3V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	1.5V				
		V <sub>IN</sub> = 3.3V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	1.8V				
		V <sub>IN</sub> = 4.0V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	2.5V				
Dropout Voltage	V <sub>DROP</sub>	I <sub>OUT</sub> = 100mA		-	1.00	1.2	V
		I <sub>OUT</sub> = 1A		-	1.2	1.3	
Current Limit	I <sub>limit</sub>	V <sub>IN</sub> - V <sub>OUT</sub> = 2V, T <sub>J</sub> = 25°C		1	-	-	A
Minimum Load Current	I <sub>min</sub>		ADJ	-	2	10	mA
Quiescent Current	I <sub>q</sub>	V <sub>IN</sub> = 10V	1.2V	-	5	10	mA
		V <sub>IN</sub> = 12V	1.5V				
		V <sub>IN</sub> = 12V	1.8V				
		V <sub>IN</sub> = 12V	2.5V				
		V <sub>IN</sub> = 12V	3.3V				
		V <sub>IN</sub> = 12V	5.0V				
Adjust Pin Current	I <sub>ADJ</sub>	V <sub>IN</sub> = 5V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	ADJ	-	60	120	μA
I <sub>ADJ</sub> change	I <sub>CHANGE</sub>	V <sub>IN</sub> = 5V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	ADJ	-	0.2	10	μA
Temperature Coefficient	ΔV/ΔT			-	±100	-	ppm
Ripple Rejection	PSRR	f <sub>RIPPLE</sub> = 120Hz, V <sub>IN</sub> - V <sub>OUT</sub> = 3V, V <sub>RIPPLE</sub> = 1V <sub>PP</sub>		60	75		dB
Thermal Resistor	θ <sub>JC</sub>	SOT-223		-	20	-	°C/W
		TO-252		-	10	-	
		SOT-89-3		-	40	-	

NOTE1: All test conducted under ambient temperature 25°C and within a short period of time 20ms

NOTE2: Load current smaller than minimum load current of A1117B-ADJ will lead to unstable or oscillation output.




## TYPICAL PERFORMANCE CHARACTERISTICS

T=25°C, unless specified.


### 1. Line Regulation

A1117B-ADJ  $V_{OUT}$  Vs.  $V_{IN}$

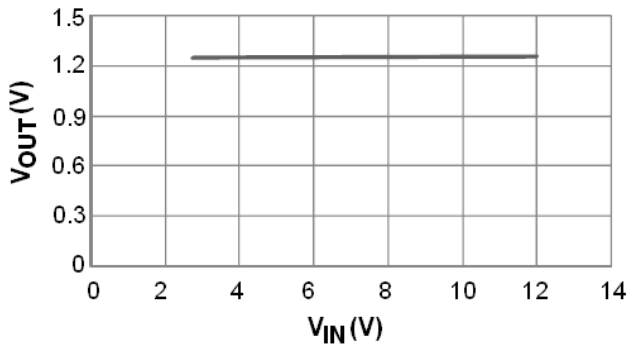


### 2. Load Regulation

A1117B-ADJ  $V_{OUT}$  Vs.  $I_{OUT}$

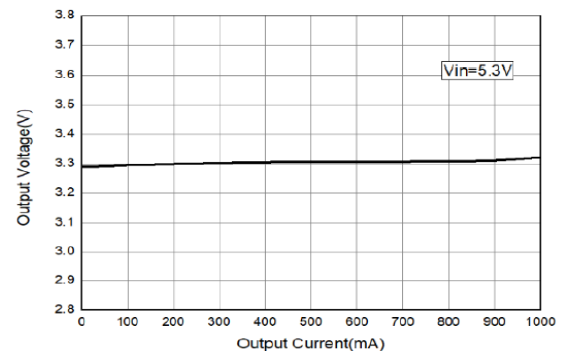


### 3. Dropout Voltage


A1117B-ADJ Dropout Vs.  $I_{OUT}$

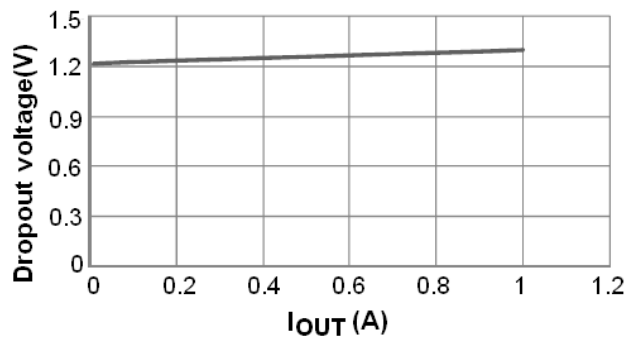


### 4. Line transient response

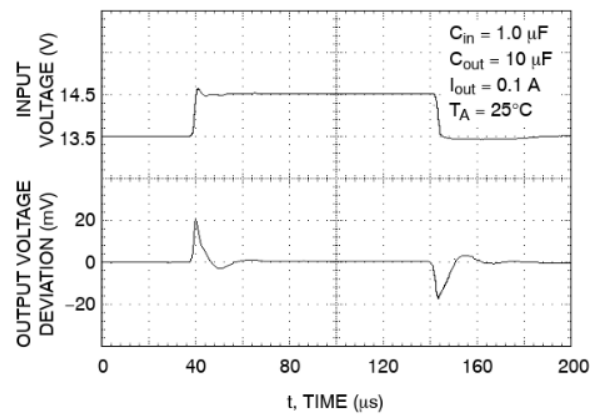

### 5. Load transient response

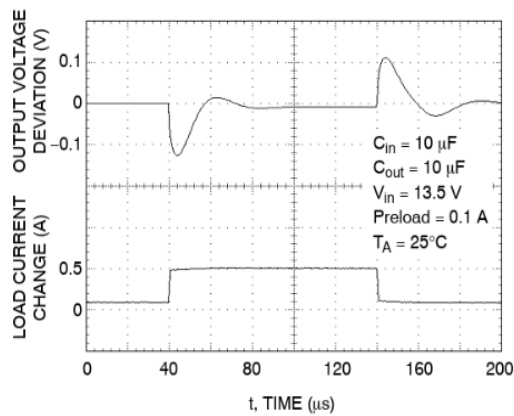


### 6. Ripple Rejection VS Output Current

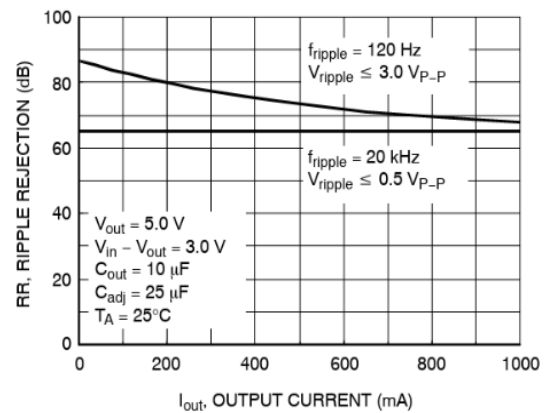



## BLOCK DIAGRAM

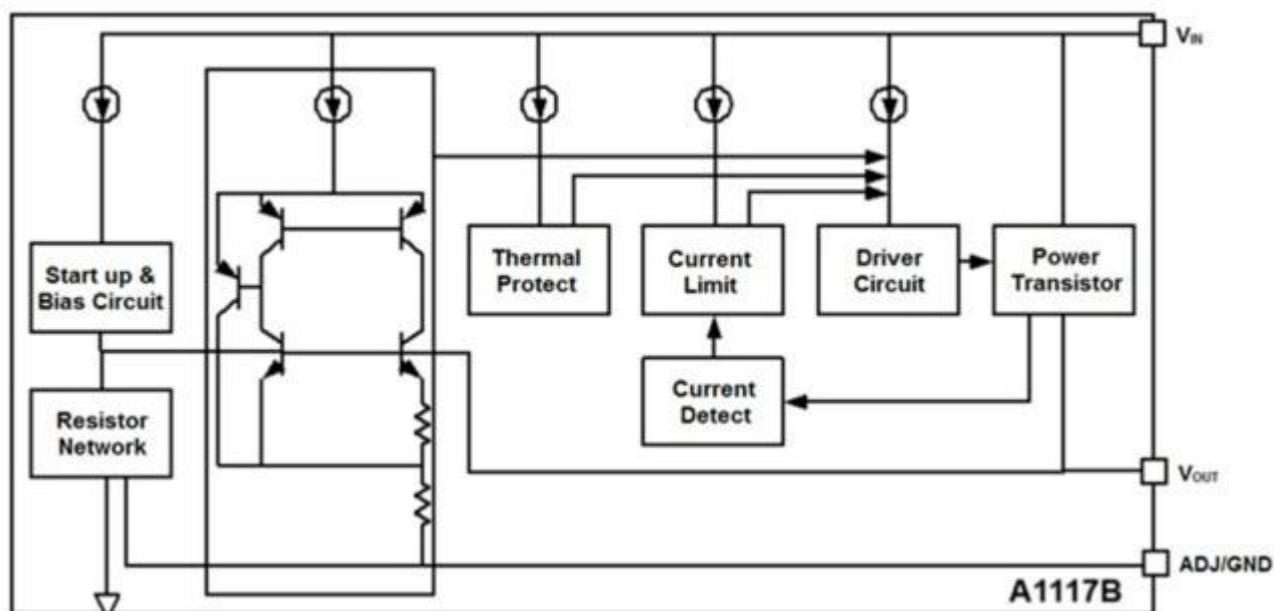



## DETAILED DESCRIPTION

A1117B is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, current limit, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

## TYPICAL APPLICATION

A1117B has an adjustable version and fixed versions (1.2V, 1.8V, 2.5V, 3.3V and 5V)

### Fixed Output Voltage Version

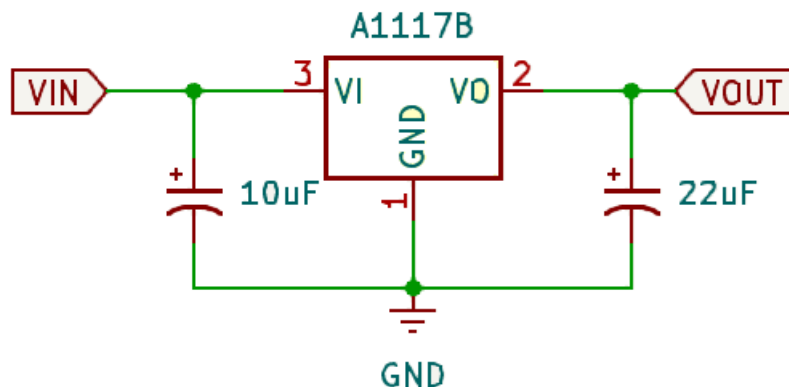


Application circuit of A1117B fixed version

1. Recommend using 10µF tan capacitor as bypass capacitor for all application circuit.
2. Recommend using above 10µF tan capacitor to assure circuit stability.



### Adjustable Output Voltage Version

A1117B-ADJ provides a 1.25V reference voltage. Any output voltage between 1.25V~12V can be achievable by choosing two external resistors (schematic is shown below), R1 and R2

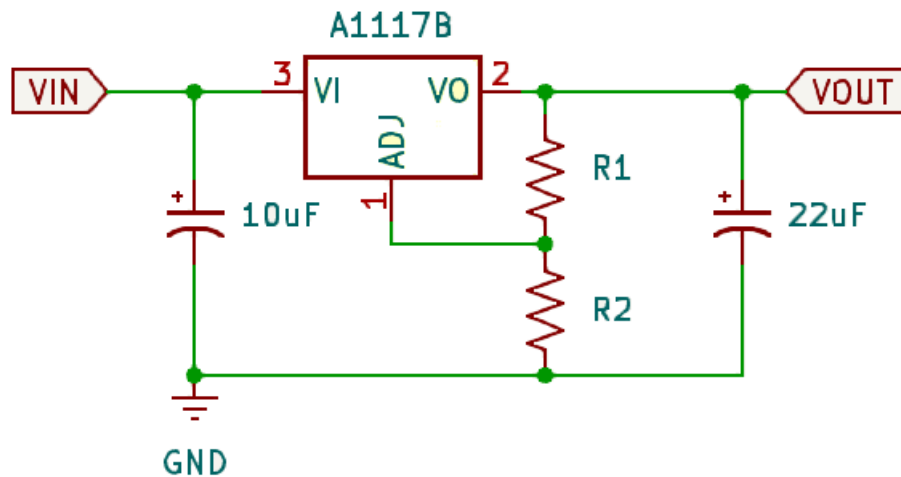

Application Circuit of A1117B-ADJ

The output voltage of adjustable version follows the equation:  $V_{OUT} = 1.25 \times (1 + R2/R1) + I_{ADJ} \times R2$ . We can ignore  $I_{ADJ}$  because  $I_{ADJ}$  (about 50uA) is much less than the current of R1 (about 2~10mA).

1. To meet the minimum load current (>10mA) requirement, R1 is recommended to be 125Ω or lower. As A1117B-ADJ can keep itself stable at load current about 2mA, R1 is not allowed to be higher than 625Ω.
2. Using a bypass capacitor ( $C_{ADJ}$ ) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of  $C_{ADJ}$  should be less than R1 to prevent ripple from being amplified. As R1 is normally in the range of 100Ω~500Ω, the value of  $C_{ADJ}$  should satisfy this equation:  $1/(2\pi \times f_{ripple} \times C_{ADJ}) < R1$ .


### THERMAL CONSIDERATIONS

We have to take heat dissipation into great consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by A1117B is very large. A1117B series uses the SOT-223 package type, and its thermal resistance is about 20°C/W. And the copper area of the application board can affect the total thermal resistance. If the copper area is 5cm\*5cm (two sides), the resistance is about 30°C/W. So the total thermal resistance is about 20°C/W + 30°C/W. We can decrease total thermal resistance by increasing copper area in the application board. When there is no good heat dissipation copper in PCB, the total thermal resistance will be as high as 120°C/W, then the power dissipation of A1117B could be allowed on itself is less than 1W. Furthermore, A1117B will work at junction temperatures higher than 125°C under such conditions, and no lifetime is guaranteed.



## PACKAGE INFORMATION

Dimension in SOT-223 (Unit: mm)

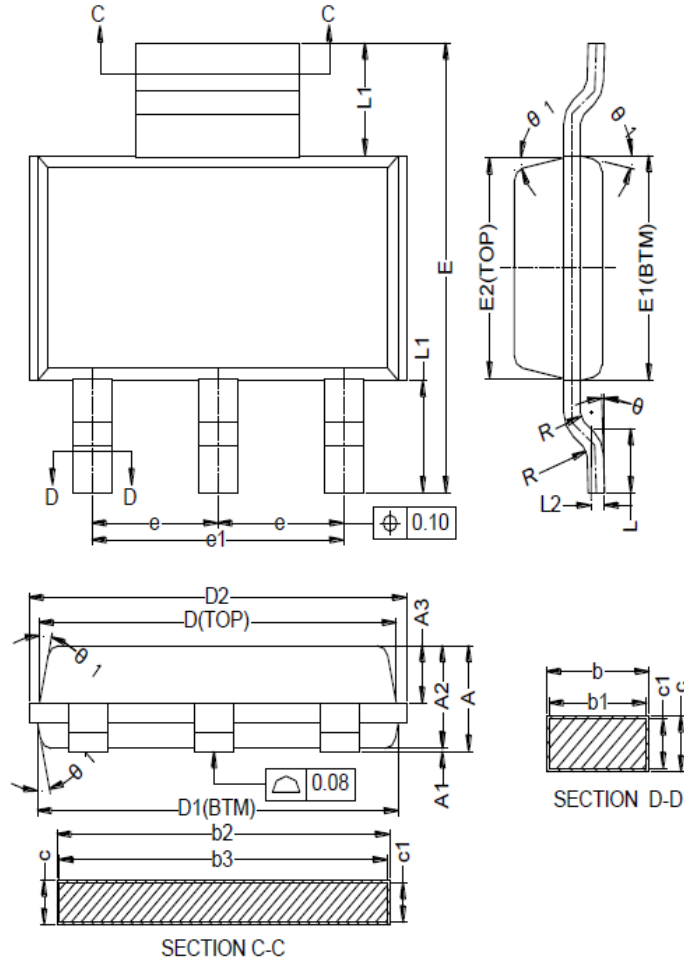


Symbol	Min	Max	Symbol	Min	Max
A	-	1.80	E	6.80	7.20
A1	0.02	0.10	E1	3.40	3.60
A2	1.50	1.70	E2	3.33	3.53
A3	0.80	1.00	e	2.30BSC	
b	0.67	0.80	e1	4.60BSC	
b1	0.66	0.76	L	0.80	1.20
b2	2.96	3.09	L1	1.75REF	
b3	2.95	3.05	L2	0.25BSC	
c	0.30	0.35	R	0.10	-
c1	0.29	0.31	R1	0.10	-
D	6.48	6.58	θ	0°	8°
D1	6.55	6.65	θ1	10°	14°
D2	-	7.05			






Dimension in TO-252 Package (Unit: mm)

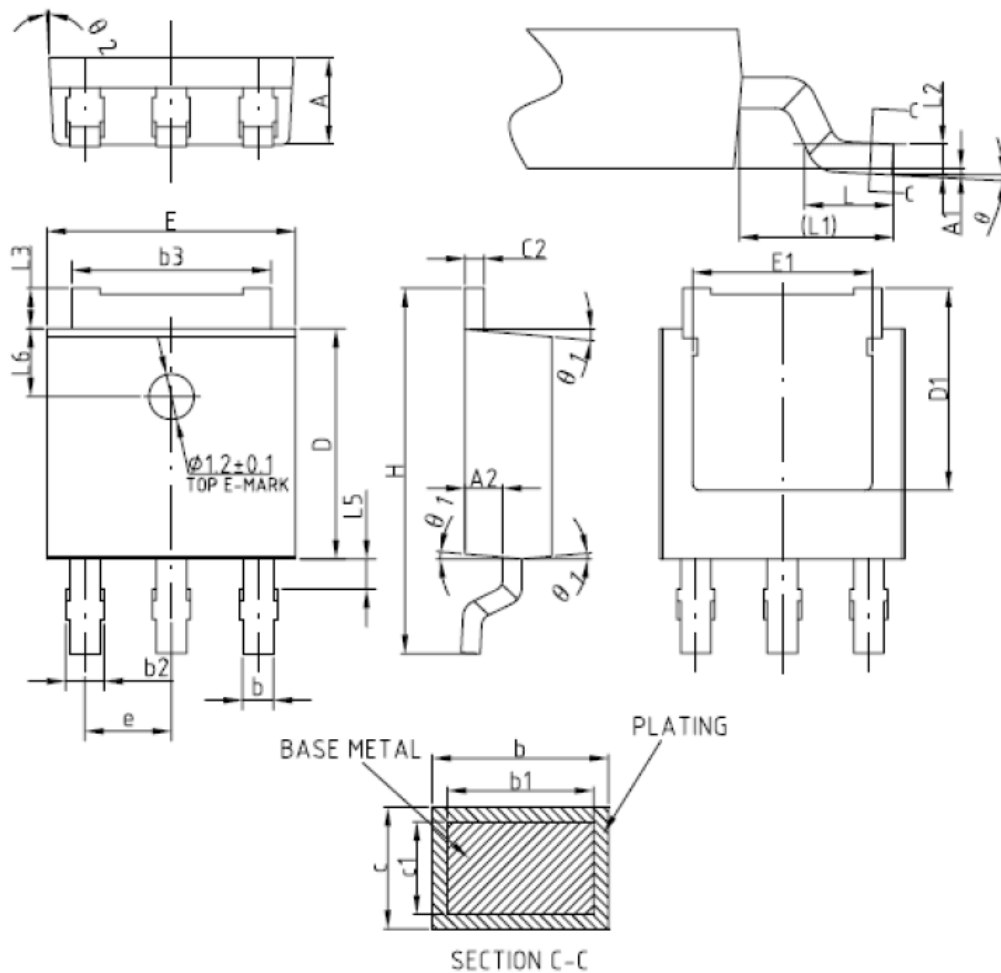

Symbol	Min	Max	Symbol	Min	Max
A	2.20	2.38	E	6.50	6.70
A1	0.00	0.10	E1	4.70	-
A2	0.90	1.10	e	2.28BSC	
b	0.77	0.89	H	9.80	10.40
b1	0.76	0.86	L	1.40	1.70
b2	0.77	1.10	L1	2.90REF	
b3	5.23	5.43	L2	0.51BSC	
c	0.47	0.60	L3	0.90	1.25
c1	0.46	0.56	L5	0.90	1.50
c2	0.47	0.60	L6	1.80REF	
D	6.00	6.20	θ	0°	8°
D1	5.25	-	θ1	3°	7°
			θ2	1°	5°



Dimension in SOT89-3 (Unit: mm)

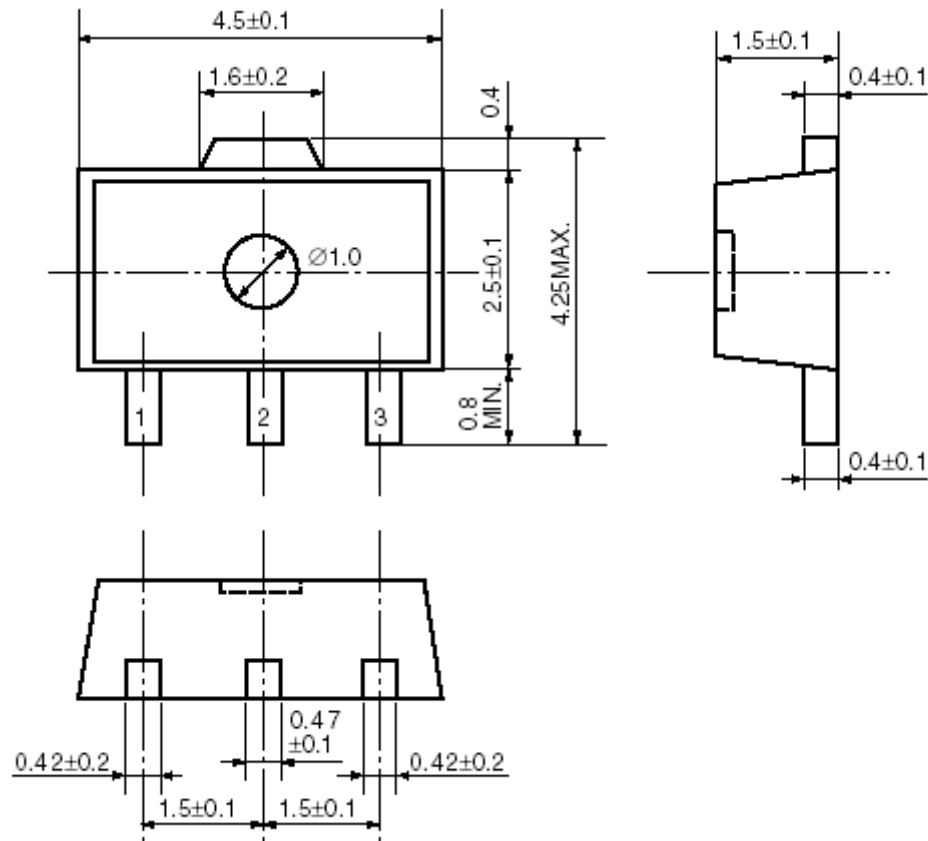



## IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or servere property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.