

**DESCRIPTION**

The SS52A_SS520A are available in SMA package.

MECHANICAL DATA


- Case: SMA
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.07g / 0.002oz

ORDERING INFORMATION

Package Type	Part Number
SMA	SS52A
	SS54A
	SS56A
	SS58A
	SS510A
	SS512A
	SS515A
	SS520A
Note	SPQ: 5,000pcs/Reel
AiT provides all RoHS Compliant Products	

FEATURE

- Metal Silicon Junction, Majority Carrier Conduction
- For Surface Mounted Applications
- Low Power Loss, High Efficiency
- High Forward Surge Current Capability
- For use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

PIN DESCRIPTION

PIN#	DESCRIPTION
1	CATHODE
2	ANODE

**ABSOLUTE MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave ,60Hz, resistive or inductive load, for capacitive load, derate by 20 %.

Parameter		Symbol	SS52A	SS54A	SS56A	SS58A	SS510A	SS512A	SS515A	SS520A	Unit
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS Voltage		V _{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage		V _{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current		I _{F(AV)}	5								A
Peak Forward Surge Current 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)		I _{FSM}	120								A
Maximum Instantaneous Forward Voltage at 5A		V _F	0.55	0.55	0.70	0.70	0.85	0.85	0.90	0.90	V
Maximum Instantaneous Reverse Current at Rated DC Reverse Voltage	T _A =25°C	I _R	1								mA
	T _A =100°C		50								
Typical Junction Capacitance ⁽¹⁾		C _J	500	500	300	300	300	300	300	300	pF
Typical Thermal Resistance ⁽²⁾		R _{θJA}	60								°C /W
Operating Junction Temperature Range		T _J	-55 ~ + 150								°C
Storage Temperature Range		T _{STG}	-55 ~ + 150								°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm)



TYPICAL PERFORMANCE CHARACTERISTICS

Fig 1. Forward Current Derating Curve

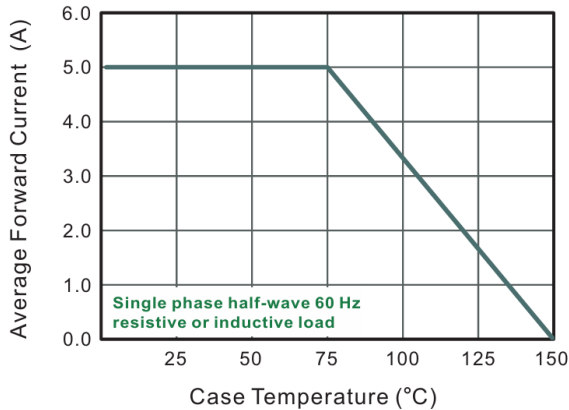


Fig 2. Typical Reverse Characteristics

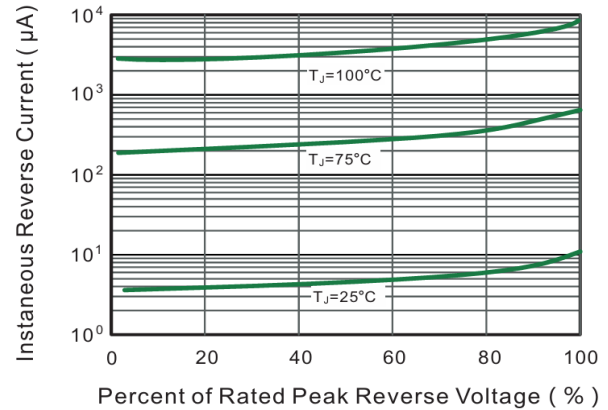


Fig 3. Typical Forward Characteristics

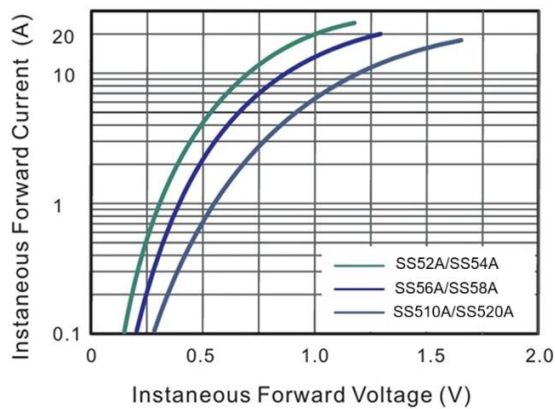


Fig 4. Typical Junction Capacitance

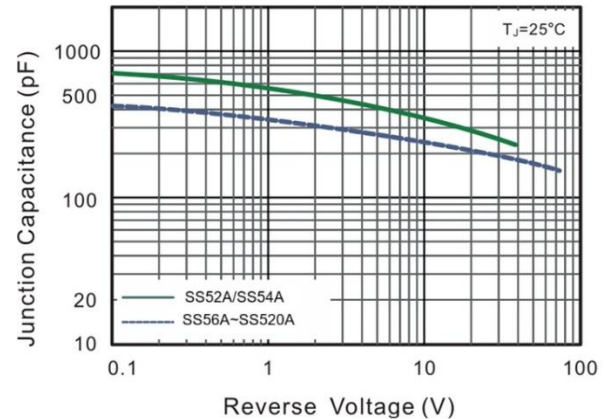


Fig 5. Maximum Non-Repetitive Peak Forward Surge Current


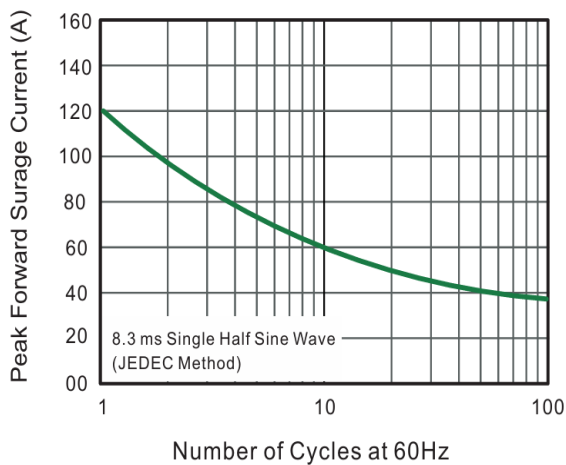




Fig 6. Typical Transient Thermal Impedance



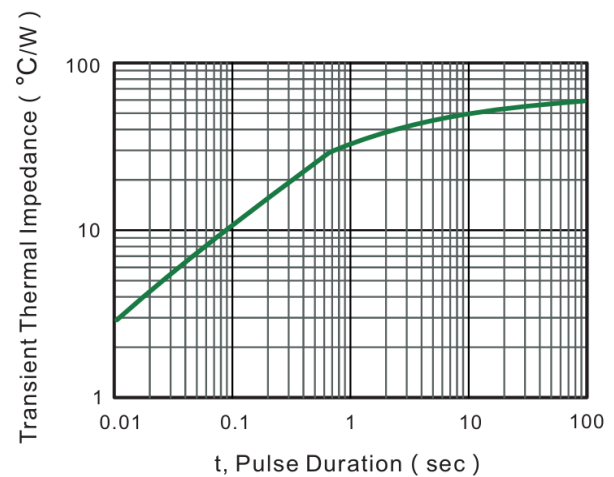

PACKAGE INFORMATION

Dimension in SMA Package

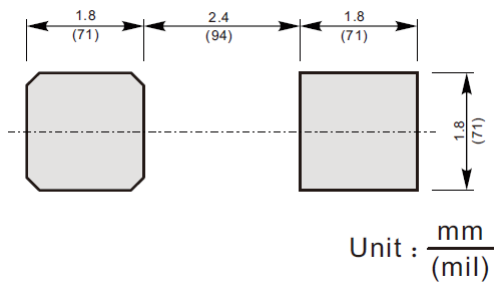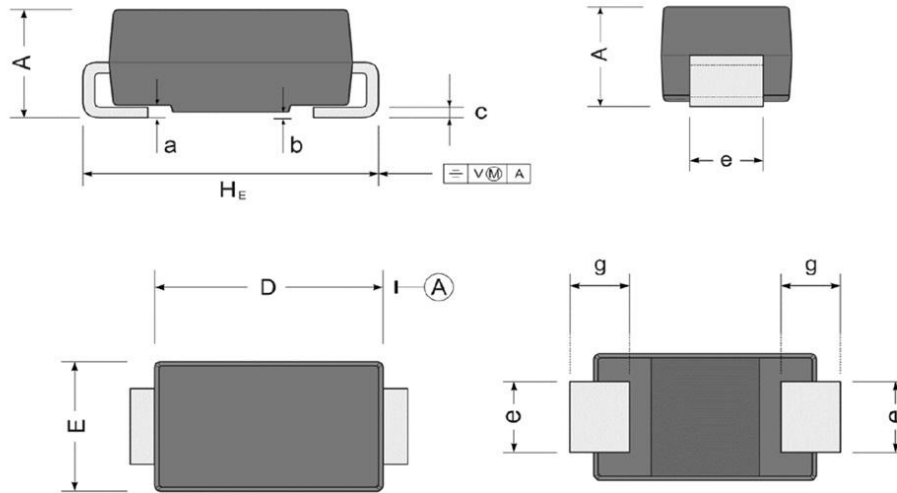

The Recommended Mounting Pad Size

DIM	MILLIMETERS	
	MIN	MAX
A	1.900	2.450
a	0.300	
b	0.050	0.200
c	0.150	0.310
D	4.000	4.500
E	2.500	2.800
e	1.300	1.800
g	0.900	1.500
H _E	4.700	5.200



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.