



DESCRIPTION

The FR101W ~ FR107W are available in SOD-123FL package

FEATURES

- Available in SOD-123FL package

ORDERING INFORMATION

Package Type	Part Number
SOD-123FL	FR101W
	FR102W
	FR103W
	FR104W
	FR105W
	FR106W
	FR107W
Note	SPQ: 3,000pcs/Reel
AiT provides all RoHS Compliant Products	

PIN DESCRIPTION



1. CATHODE
2. ANODE



ABSOLUTE MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz , resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbol	FR 101W	FR 102W	FR 103W	FR 104W	FR 105W	FR 106W	FR 107W	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_A=65^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	25							A
Maximum Instantaneous Forward Voltage at 1A	V_F	1.3							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	5 100							μA
Maximum Reverse Recovery Time ^{NOTE1}	t_{rr}	150				250	500		ns
Typical Junction Capacitance ^{NOTE2}	C_J	15							pF
Operating and Storage Temperature Range	T_J, T_{STG}	-55 ~150							$^\circ\text{C}$

NOTE1: Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{rr} = 0.25\text{A}$

NOTE2: Measured at 1MHz and applied reverse voltage of 4V D.C



TYPICAL CHARACTERISTICS

Figure. 1 Forward Current Derating Curve

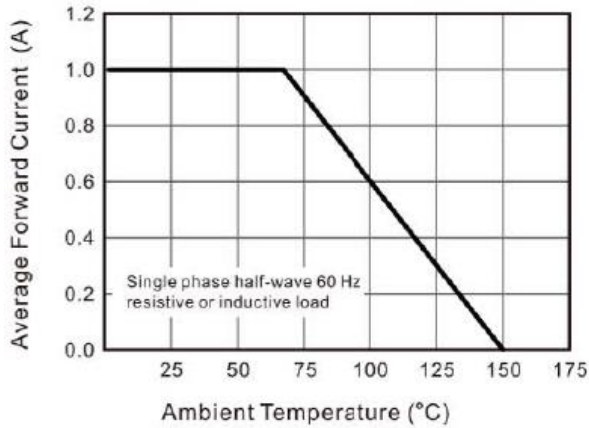


Figure. 2 Typical Reverse Characteristics

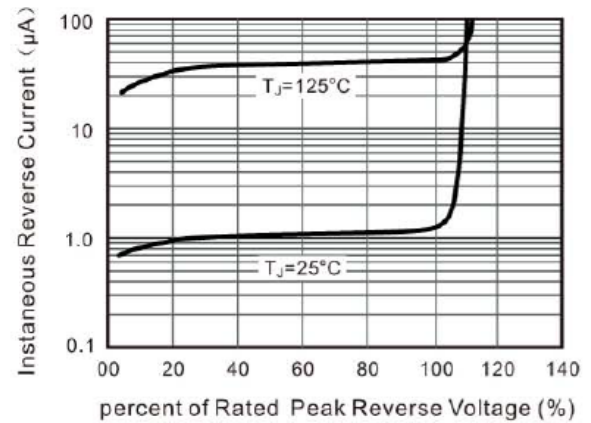


Figure. 3 Typical Instantaneous Forward Characteristic

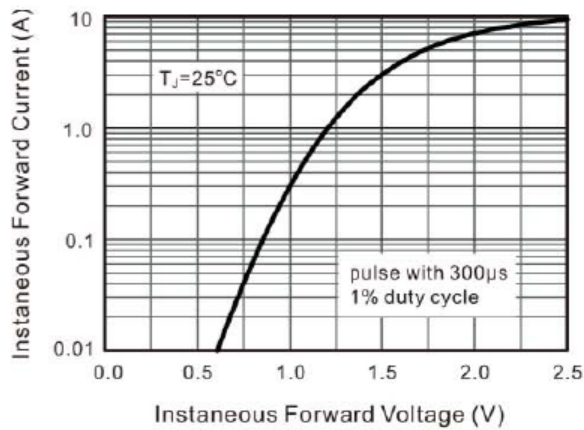


Figure. 4 Typical Junction Capacitance


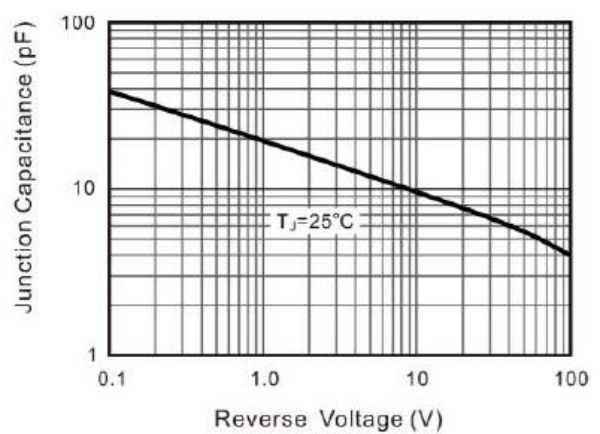


Figure. 5 Maximum Non-Repetitive Peak Forward Surge Current




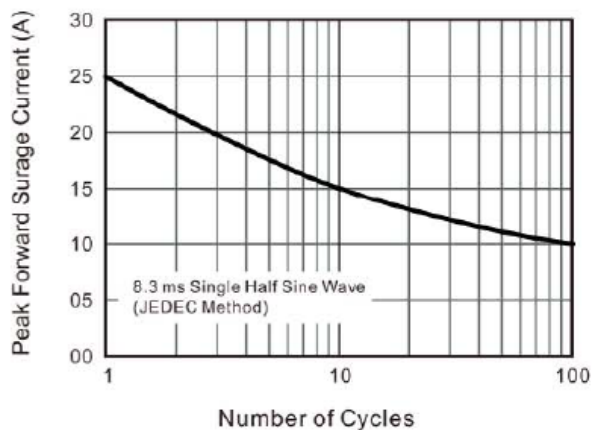


PACKAGE INFORMATION

Dimension in SOD-123FL (Unit: mm)

Plastic surface mounted package; 2 leads

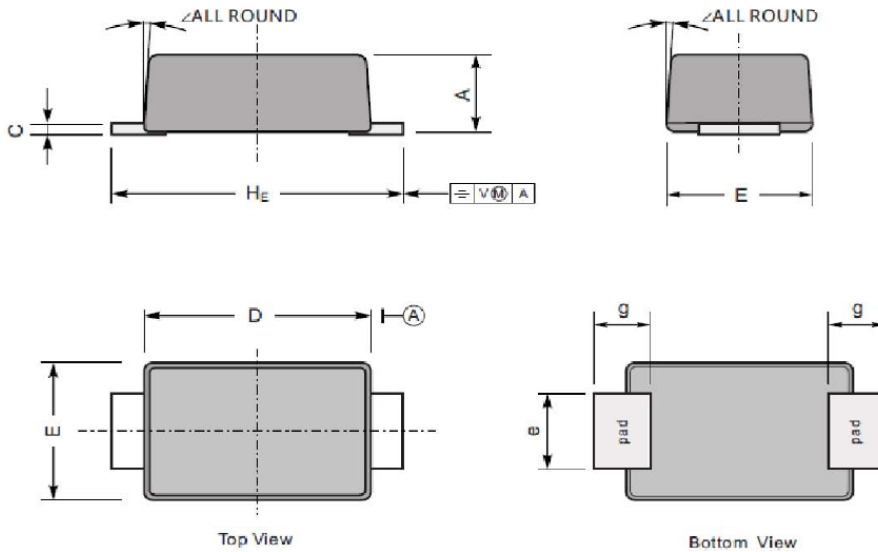

The recommended mounting pad size

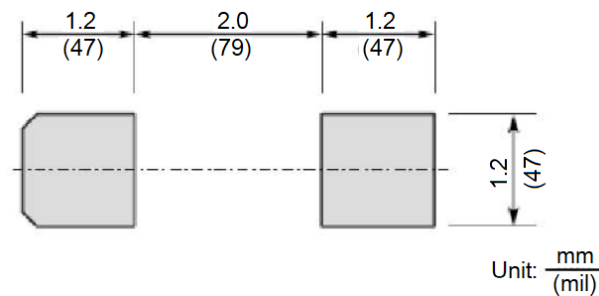

UNIT		A	B	C	E	e	g	H _E	\angle
mm	Max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	Min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	Max	43	7.9	114	75	43	35	150	
	Min	35	4.7	102	67	31	28	138	



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. 's integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.